

Please type a plus sign (+) inside this box ☐ ☒

PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. ID1048

Total Pages 4

First Named Inventor or Application Identifier

John Paul Russell et al.

Express Mail Label No. EL068348496US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 30]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 15]
4. Oath or Declaration [Total Pages]
 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Other: Permit to File Abroad

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

021498

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME

John D. Crane, Reg. No. 25,231

ADDRESS

Northern Telecom - Patent Department
P.O. Box 832130

CITY

Richardson

STATE

TX

ZIP CODE

75083-2130

COUNTRY

USA

TELEPHONE

972/685-8442

FAX

972/685-3030

Burden Hour Statement: This form is estimated take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Approved use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

PTO/SB/17 (12-97)

<h2 style="margin: 0;">FEE TRANSMITTAL</h2> <p style="font-size: small; margin: 5px 0;">Note: Effective October 1, 1997. Patent fees are subject to annual revision.</p>	<p style="text-align: center; margin: 0;">Complete if Known</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Application Number</td> <td>Unknown</td> </tr> <tr> <td>Filing Date</td> <td>Oct. 6, 1998</td> </tr> <tr> <td>First Named Inventor</td> <td>John Paul Russell et al.</td> </tr> <tr> <td>Group Art Unit</td> <td>***</td> </tr> <tr> <td>Examiner Name</td> <td>Unknown</td> </tr> <tr> <td>Attorney Docket Number</td> <td>ID1048</td> </tr> </table>	Application Number	Unknown	Filing Date	Oct. 6, 1998	First Named Inventor	John Paul Russell et al.	Group Art Unit	***	Examiner Name	Unknown	Attorney Docket Number	ID1048
Application Number	Unknown												
Filing Date	Oct. 6, 1998												
First Named Inventor	John Paul Russell et al.												
Group Art Unit	***												
Examiner Name	Unknown												
Attorney Docket Number	ID1048												
TOTAL AMOUNT OF PAYMENT (\$ 928													

<h3 style="margin: 0;">METHOD OF PAYMENT (check one)</h3> <p>1. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:</p> <p>Deposit Account Number <u>50-0210</u></p> <p>Deposit Account Name <u>Northern Telecom, Inc.</u></p> <p><input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 <input type="checkbox"/> Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance</p> <p>2. <input type="checkbox"/> Payment Enclosed: <input type="checkbox"/> Check <input type="checkbox"/> Money Order <input type="checkbox"/> Other </p> <h3 style="margin: 0;">FEE CALCULATION</h3> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <h4 style="margin: 0;">1. FILING FEE</h4> <table style="width: 100%; font-size: small;"> <thead> <tr> <th>Large Entity Fee Code</th> <th>Small Entity Fee Code</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr> <td>101 790</td> <td>201 395</td> <td>Utility filing fee</td> <td>610</td> </tr> <tr> <td>106 330</td> <td>206 165</td> <td>Design filing fee</td> <td></td> </tr> <tr> <td>107 540</td> <td>207 270</td> <td>Plant filing fee</td> <td></td> </tr> <tr> <td>108 790</td> <td>208 395</td> <td>Reissue filing fee</td> <td></td> </tr> <tr> <td>114 150</td> <td>214 75</td> <td>Provisional filing fee</td> <td></td> </tr> <tr> <td colspan="3" style="text-align: right;">SUBTOTAL (1)</td> <td>(\$ 610)</td> </tr> </tbody> </table> </div> <div style="border: 1px solid black; padding: 5px;"> <h4 style="margin: 0;">2. CLAIMS</h4> <table style="width: 100%; font-size: small;"> <thead> <tr> <th>Total Claims</th> <th>Extra</th> <th>Fee from below</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr> <td>29</td> <td>-20 = 9</td> <td>X 14 =</td> <td>126</td> </tr> <tr> <td>Independent Claims 6</td> <td>-3 = 3</td> <td>X 64 =</td> <td>192</td> </tr> <tr> <td>Multiple Dependent Claims 0</td> <td>X 210 =</td> <td></td> <td>0</td> </tr> </tbody> </table> <table style="width: 100%; font-size: small;"> <thead> <tr> <th>Large Entity Fee Code</th> <th>Small Entity Fee Code</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr> <td>103 22</td> <td>203 11</td> <td>Claims in excess of 20</td> <td></td> </tr> <tr> <td>102 82</td> <td>202 41</td> <td>Independent claims in excess of 3</td> <td></td> </tr> <tr> <td>104 270</td> <td>204 135</td> <td>Multiple dependent claim</td> <td></td> </tr> <tr> <td>109 82</td> <td>209 41</td> <td>Reissue independent claims over original patent</td> <td></td> </tr> <tr> <td>110 22</td> <td>210 11</td> <td>Reissue claims in excess of 20 and over original patent</td> <td></td> </tr> <tr> <td colspan="3" style="text-align: right;">SUBTOTAL (2)</td> <td>(\$ 318)</td> </tr> </tbody> </table> </div>	Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid	101 790	201 395	Utility filing fee	610	106 330	206 165	Design filing fee		107 540	207 270	Plant filing fee		108 790	208 395	Reissue filing fee		114 150	214 75	Provisional filing fee		SUBTOTAL (1)			(\$ 610)	Total Claims	Extra	Fee from below	Fee Paid	29	-20 = 9	X 14 =	126	Independent Claims 6	-3 = 3	X 64 =	192	Multiple Dependent Claims 0	X 210 =		0	Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid	103 22	203 11	Claims in excess of 20		102 82	202 41	Independent claims in excess of 3		104 270	204 135	Multiple dependent claim		109 82	209 41	Reissue independent claims over original patent		110 22	210 11	Reissue claims in excess of 20 and over original patent		SUBTOTAL (2)			(\$ 318)	<h3 style="margin: 0;">FEE CALCULATION (continued)</h3> <table style="width: 100%; font-size: small;"> <thead> <tr> <th>Large Entity Fee Code</th> <th>Small Entity Fee Code</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr> <td>105 130</td> <td>205 65</td> <td>Surcharge - late filing fee or oath</td> <td>0</td> </tr> <tr> <td>127 50</td> <td>227 25</td> <td>Surcharge - late provisional filing fee or cover sheet</td> <td>0</td> </tr> <tr> <td>139 130</td> <td>139 130</td> <td>Non-English specification</td> <td>0</td> </tr> <tr> <td>147 2,520</td> <td>147 2,520</td> <td>For filing a request for reexamination</td> <td>0</td> </tr> <tr> <td>112 920*</td> <td>112 920*</td> <td>Requesting publication of SIR prior to Examiner action</td> <td>0</td> </tr> <tr> <td>113 1,840*</td> <td>113 1,840*</td> <td>Requesting publication of SIR after Examiner action</td> <td>0</td> </tr> <tr> <td>115 110</td> <td>215 55</td> <td>Extension for reply within first month</td> <td>0</td> </tr> <tr> <td>116 400</td> <td>216 200</td> <td>Extension for reply within second month</td> <td>0</td> </tr> <tr> <td>117 950</td> <td>217 475</td> <td>Extension for reply within third month</td> <td>0</td> </tr> <tr> <td>118 1,510</td> <td>218 755</td> <td>Extension for reply within fourth month</td> <td>0</td> </tr> <tr> <td>128 2,060</td> <td>228 1,030</td> <td>Extension for reply within fifth month</td> <td>0</td> </tr> <tr> <td>119 310</td> <td>219 155</td> <td>Notice of Appeal</td> <td>0</td> </tr> <tr> <td>120 310</td> <td>220 155</td> <td>Filing a brief in support of an appeal</td> <td>0</td> </tr> <tr> <td>121 270</td> <td>221 135</td> <td>Request for oral hearing</td> <td>0</td> </tr> <tr> <td>138 1,510</td> <td>138 1,510</td> <td>Petition to institute a public use proceeding</td> <td>0</td> </tr> <tr> <td>140 110</td> <td>240 55</td> <td>Petition to revive - unavoidable</td> <td>0</td> </tr> <tr> <td>141 1,320</td> <td>241 660</td> <td>Petition to revive - unintentional</td> <td>0</td> </tr> <tr> <td>142 1,320</td> <td>242 660</td> <td>Utility issue fee (or reissue)</td> <td>0</td> </tr> <tr> <td>143 450</td> <td>243 225</td> <td>Design issue fee</td> <td>0</td> </tr> <tr> <td>144 670</td> <td>244 335</td> <td>Plant issue fee</td> <td>0</td> </tr> <tr> <td>122 130</td> <td>122 130</td> <td>Petitions to the Commissioner</td> <td>0</td> </tr> <tr> <td>123 50</td> <td>123 50</td> <td>Petitions related to provisional applications</td> <td>0</td> </tr> <tr> <td>126 240</td> <td>126 240</td> <td>Submission of Information Disclosure Stmt</td> <td>0</td> </tr> <tr> <td>581 40</td> <td>581 40</td> <td>Recording each patent assignment per property (times number of properties)</td> <td>0</td> </tr> <tr> <td>146 790</td> <td>246 395</td> <td>Filing a submission after final rejection (37 CFR 1.129(a))</td> <td>0</td> </tr> <tr> <td>149 790</td> <td>249 395</td> <td>For each additional invention to be examined (37 CFR 1.129(b))</td> <td>0</td> </tr> <tr> <td colspan="3">Other fee (specify) _____</td> <td>0</td> </tr> <tr> <td colspan="3">Other fee (specify) _____</td> <td>0</td> </tr> <tr> <td colspan="3" style="text-align: right;">SUBTOTAL (3)</td> <td>(\$ 0)</td> </tr> </tbody> </table> <p style="font-size: x-small;">* Reduced by Basic Filing Fee Paid</p>	Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid	105 130	205 65	Surcharge - late filing fee or oath	0	127 50	227 25	Surcharge - late provisional filing fee or cover sheet	0	139 130	139 130	Non-English specification	0	147 2,520	147 2,520	For filing a request for reexamination	0	112 920*	112 920*	Requesting publication of SIR prior to Examiner action	0	113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	0	115 110	215 55	Extension for reply within first month	0	116 400	216 200	Extension for reply within second month	0	117 950	217 475	Extension for reply within third month	0	118 1,510	218 755	Extension for reply within fourth month	0	128 2,060	228 1,030	Extension for reply within fifth month	0	119 310	219 155	Notice of Appeal	0	120 310	220 155	Filing a brief in support of an appeal	0	121 270	221 135	Request for oral hearing	0	138 1,510	138 1,510	Petition to institute a public use proceeding	0	140 110	240 55	Petition to revive - unavoidable	0	141 1,320	241 660	Petition to revive - unintentional	0	142 1,320	242 660	Utility issue fee (or reissue)	0	143 450	243 225	Design issue fee	0	144 670	244 335	Plant issue fee	0	122 130	122 130	Petitions to the Commissioner	0	123 50	123 50	Petitions related to provisional applications	0	126 240	126 240	Submission of Information Disclosure Stmt	0	581 40	581 40	Recording each patent assignment per property (times number of properties)	0	146 790	246 395	Filing a submission after final rejection (37 CFR 1.129(a))	0	149 790	249 395	For each additional invention to be examined (37 CFR 1.129(b))	0	Other fee (specify) _____			0	Other fee (specify) _____			0	SUBTOTAL (3)			(\$ 0)
Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid																																																																																																																																																																																														
101 790	201 395	Utility filing fee	610																																																																																																																																																																																														
106 330	206 165	Design filing fee																																																																																																																																																																																															
107 540	207 270	Plant filing fee																																																																																																																																																																																															
108 790	208 395	Reissue filing fee																																																																																																																																																																																															
114 150	214 75	Provisional filing fee																																																																																																																																																																																															
SUBTOTAL (1)			(\$ 610)																																																																																																																																																																																														
Total Claims	Extra	Fee from below	Fee Paid																																																																																																																																																																																														
29	-20 = 9	X 14 =	126																																																																																																																																																																																														
Independent Claims 6	-3 = 3	X 64 =	192																																																																																																																																																																																														
Multiple Dependent Claims 0	X 210 =		0																																																																																																																																																																																														
Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid																																																																																																																																																																																														
103 22	203 11	Claims in excess of 20																																																																																																																																																																																															
102 82	202 41	Independent claims in excess of 3																																																																																																																																																																																															
104 270	204 135	Multiple dependent claim																																																																																																																																																																																															
109 82	209 41	Reissue independent claims over original patent																																																																																																																																																																																															
110 22	210 11	Reissue claims in excess of 20 and over original patent																																																																																																																																																																																															
SUBTOTAL (2)			(\$ 318)																																																																																																																																																																																														
Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid																																																																																																																																																																																														
105 130	205 65	Surcharge - late filing fee or oath	0																																																																																																																																																																																														
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	0																																																																																																																																																																																														
139 130	139 130	Non-English specification	0																																																																																																																																																																																														
147 2,520	147 2,520	For filing a request for reexamination	0																																																																																																																																																																																														
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	0																																																																																																																																																																																														
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	0																																																																																																																																																																																														
115 110	215 55	Extension for reply within first month	0																																																																																																																																																																																														
116 400	216 200	Extension for reply within second month	0																																																																																																																																																																																														
117 950	217 475	Extension for reply within third month	0																																																																																																																																																																																														
118 1,510	218 755	Extension for reply within fourth month	0																																																																																																																																																																																														
128 2,060	228 1,030	Extension for reply within fifth month	0																																																																																																																																																																																														
119 310	219 155	Notice of Appeal	0																																																																																																																																																																																														
120 310	220 155	Filing a brief in support of an appeal	0																																																																																																																																																																																														
121 270	221 135	Request for oral hearing	0																																																																																																																																																																																														
138 1,510	138 1,510	Petition to institute a public use proceeding	0																																																																																																																																																																																														
140 110	240 55	Petition to revive - unavoidable	0																																																																																																																																																																																														
141 1,320	241 660	Petition to revive - unintentional	0																																																																																																																																																																																														
142 1,320	242 660	Utility issue fee (or reissue)	0																																																																																																																																																																																														
143 450	243 225	Design issue fee	0																																																																																																																																																																																														
144 670	244 335	Plant issue fee	0																																																																																																																																																																																														
122 130	122 130	Petitions to the Commissioner	0																																																																																																																																																																																														
123 50	123 50	Petitions related to provisional applications	0																																																																																																																																																																																														
126 240	126 240	Submission of Information Disclosure Stmt	0																																																																																																																																																																																														
581 40	581 40	Recording each patent assignment per property (times number of properties)	0																																																																																																																																																																																														
146 790	246 395	Filing a submission after final rejection (37 CFR 1.129(a))	0																																																																																																																																																																																														
149 790	249 395	For each additional invention to be examined (37 CFR 1.129(b))	0																																																																																																																																																																																														
Other fee (specify) _____			0																																																																																																																																																																																														
Other fee (specify) _____			0																																																																																																																																																																																														
SUBTOTAL (3)			(\$ 0)																																																																																																																																																																																														

SUBMITTED BY Typed or Printed Name <u>John D. Crane</u>		Complete (if applicable) Reg. Number <u>25,231</u>	
Signature <u>John D. Crane</u>	Date <u>10/06/98</u>	Deposit Account User ID <u>50-0210</u>	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

09165814 100698

10/06/98

CONCATENATION OF CONTAINERS IN SYNCHRONOUS DIGITAL HIERARCHY NETWORK

Field of the Invention

5 The present invention relates to containers in a synchronous digital network, and particularly, although not exclusively, to a synchronous digital hierarchy (SDH) network or a synchronous optical network (SONET).

Background to the Invention

10 Historically, the telecommunications industry has developed separately and largely independently from the computing industry. Conventional telecommunications systems are characterized by having high reliability circuit switched networks for communicating over long distances, whereas data communications between communicating computers is largely based upon
15 shared access packet communications.

 Datacoms may operate over a local area, to form a local area network (LAN) or over a wide area to form a wide area network (WAN). Historically the difference between a LAN and a WAN is one of geographical coverage. A LAN
20 may cover communicating computing devices distributed over an area of kilometers or tens of kilometers, whereas a WAN may encompass communicating computing devices distributed over a wider geographical area, of the order of hundreds of kilometers or greater.

25 However, the historical distinction between local area networks and wide area networks is becoming increasingly blurred.

 Conventional local area networks are generally taken to be digital data networks operating at rates in excess of 1 Mbits/s over distances of from a few
30 meters up to several kilometers. Conventional local area networks are almost universally serial systems, in which both data and control functions are carried through the same channel or medium. Local area networks are primarily data transmission systems intended to link computer devices and associated devices within a restricted geographical area. However, many local area networks
35 include speech transmission as a service. A plurality of computer and associated devices linked together in a LAN may range from anything from a full-scale mainframe computing system to a collection of small personal computers. Since a local area network is confined to a restricted geographical area, it is possible to

employ vastly different transmission methods from those commonly used in telecommunications systems. Local area networks are usually specific to a particular organization which owns them and can be completely independent of the constraints imposed by public telephone authorities, the ITU, and other public services. Local area networks are characterized by comprising inexpensive line driving equipment rather than the relatively complex modems needed for public analog networks. High data transmission rates are achieved by utilizing the advantages of short distance.

On the other hand, conventional wide area networks operate in general on a greater scale than local area networks. A wide area network is generally employed whenever information in electronic form on cables leaves a site, even for short distances. Wide area networks are generally carried over public telecommunications networks.

Because conventional telecoms systems have developed in parallel with conventional datacoms systems, there is a significant mis-match in data rates between conventional datacoms protocols as used in LANs and WANs, and conventional telecoms protocols. In general, telecoms operators provide equipment having standard telecoms interfaces, for example E1, T1, E3, T3, STM-1, which are used by the datacoms industry to provide wide area network point to point links. However, this is inconvenient for datacoms providers since datacoms protocols have developed using a completely different set of interfaces and protocols, for example carrier sense multiple access collision detection CSMA/CD systems, subject of IEEE standard 802.3, and Ethernet which is available in 10 MBits/s, 100 MBits/s and 1 GigaBits/s versions. Conventional datacoms protocols do not match up very well to conventional telecoms interfaces, for example E1, E3, T1, STM-1 data rates, because of a mis-match in data rates and technologies between conventional datacoms and conventional telecoms.

In order to provide transport of OSI layer 2 datacoms traffic cover a wide area in an efficient manner, the inventors have previously disclosed transport of OSI layer 2 data frames over synchronous digital hierarchy networks (including SONET).

In the applicant's co-pending US patent application entitled "Frame Based Data Transmission over Synchronous Digital Hierarchy Network", a copy of which is filed herewith, there is disclosed a method of carrying OSI layer 2 frame based

data, for example IEEE standard 802.3 carrier sense multiple access/collision detection (CSMA/CD) local area network packets, Ethernet packets, conventional token ring packets, conventional token bus packets, and fiber distributed data interface (FDDI) packets directly over a synchronous digital network. Such disclosed system may provide OSI layer 2 switching functionality such as was previously available in prior art local area networks, but extended over a wider geographical coverage area which has been historically considered to have been provided only by prior art wide area networks.

10 In the applicant's co-pending US patent application entitled "payload Mapping in Synchronous Networks", a copy of which is filed herewith, there is disclosed a method and apparatus for containment of OSI layer 2 frame based data into a set of synchronous digital hierarchy (SDH) virtual containers, by rate adapting a plurality of OSI layer 2 data frames by invoking buffering and flow control in a rate adaption means, and mapping the rate adapted OSI 2 data frames directly into a plurality of SDH virtual containers. This process enables a virtual OSI 2 local area network to be constructed across a wide area network supported by a synchronous digital transport layer.

20 Since data rates used by conventional OSI layer 2 datacoms systems are either higher than data rates of individual virtual containers in SDH systems or fit inefficiently into available faster virtual containers, there is the problem of how to carry higher bit rate OSI layer 2 datacoms traffic in SDH virtual containers, to achieve the result of an OSI layer 2 channel carried over an SDH network.

25

Summary of the Invention

An object of the present invention is to provide a synchronous digital container system within the confines of ITU-T recommendation G.70X which provides high efficiency and minimum delay for transport of frame based data packets directly over a synchronous digital network without further encapsulation in intermediate protocol layers.

35 A further object of the present invention is to provide an SDH frame structure suitable for transmitting and receiving frame based data in a manner which overcomes variations in delay between different paths across a synchronous network.

Specific implementations of the present invention aim to provide a method and apparatus for virtual concatenation of VC-3s, and VC-12s in a form which is

09165814 100698

suitable for carrying frame based data. In this specification, the term "virtual concatenation" is used where the underlying network is unaware of any special relationship between the virtual containers which make up a group of virtually concatenated virtual containers. Particularly, although not exclusively, such frame based data may comprise OSI layer 2 data frames.

According to one aspect of the present invention there is provided a method of transporting data over a synchronous digital network, said method comprising the steps of: generating in parallel a plurality of synchronous virtual containers, each at a lower bit rate than a bit rate of said data, each said virtual container having a payload section; associating said plurality of virtual containers with each other by means of assigning association data describing said association into said plurality of virtual containers; inputting said transported data into said payloads of said plurality of virtual containers; and outputting said plurality of associated virtual containers onto a synchronous digital network.

Preferably said plurality of associated virtual containers are output onto said synchronous digital network substantially in parallel. Said step of associating said plurality of virtual containers with each other preferably comprises inserting said association data into a plurality of payloads of said plurality of virtual containers, said association data permitting recovery of the original association at a destination end. Preferably said step of inputting said transported data into said plurality of virtual containers comprises byte interleaving bytes of a frame of said transported data between said plurality of payloads. Preferably said plurality of virtual containers are generated as a plurality of streams of virtual containers and said step of associating said plurality of virtual containers with each other comprises associating a plurality of said streams of virtual containers with each other.

Preferably said step of associating said plurality of virtual containers together by means of assigning association data comprises adding a stream of identification data to each said virtual container, said stream identification data identifying which of said plurality of streams said virtual container belongs to. The method preferably comprises including a sequence identification data to individual ones of said plurality of virtual containers, said sequence identification data designating a sequence in which said individual virtual containers are generated with respect to each other. Suitably the sequence identification data comprising a cyclically repeating code data. In the best mode, there is assigned to individual ones of said plurality of virtual containers a cyclically repeating code

sequence having a repetition period of at least $2N+1$, where N is the number of sequentially received virtual container payloads in a single stream.

Alternatively, said step of associating said plurality of virtual containers
5 together by means of assigning association data comprises utilizing a path trace
byte in a virtual container overhead as a stream identifier data for identifying a
virtual container as belonging to a particular said virtual container stream.
Instead of including sequence identification data in the virtual container payload,
said sequence identification data may be carried within a K3 byte of an overhead
10 section of said virtual container. A sequence identification code data may extend
over a plurality of said virtual containers of a said stream, for identifying a position
of each said virtual container comprising said virtual container stream.

The invention includes an apparatus for incorporating data input at a first
15 data rate into a plurality of streams of synchronous digital hierarchy virtual
containers each output at a second data rate, said apparatus comprising: means
for continuously generating a plurality of virtual containers in parallel; means for
generating data describing an association of said plurality of virtual containers,
and for assigning said association data to said plurality of associated virtual
20 containers; and means for inserting said first data rate data into said plurality of
payloads of said plurality of virtual containers.

According to a second aspect of the present invention there is provided a
method of recovering data from a plurality of synchronous virtual containers, said
25 method comprising the steps of: receiving said plurality of virtual containers;
identifying an association data from said plurality of virtual containers, said
association data indicating an association between individual ones of said
plurality of virtual containers; reading data bytes from each payload of said
plurality of associated virtual containers; and re-assembling said data from said
30 plurality of read payload data bytes.

Preferably said process of reading said data payloads comprises reading a
plurality of said payloads in a byte interleaved manner. Preferably said step of
identifying an association data from each of said plurality of virtual containers
35 comprises reading a plurality of stream identification data from said plurality of
virtual containers, said stream identification data designating which of a plurality
of streams of virtual containers said virtual containers belong to. Preferably said
step of identifying an association data between said plurality of virtual containers
comprises reading a plurality of sequence identification data designating where in

09165814-100698

a sequence of virtual containers each individual virtual container belongs. A plurality of separate streams of associated virtual containers may be received simultaneously. Said step of reading data bytes from each payload of said plurality of associated virtual containers may comprise reading said data bytes substantially in parallel from a plurality of virtual containers of a same sequence identification from a plurality of associated virtual container streams. Where the association data are not carried in a virtual container payload section, said step of identifying an association data from said plurality of virtual containers may comprise inspecting a path trace byte of each of a plurality of said virtual containers, and distinguishing from which of a set of said stream of virtual containers said individual virtual containers belong, from said read path trace data bytes. A sequence identification data designating where in a stream of said virtual containers, a said virtual container belongs, may be read from a K3 byte of a said virtual container.

The invention includes a method of recovering data carried in payloads of a plurality of associated synchronous digital hierarchy virtual containers, said method comprising the steps of: for each said virtual container: reading data indicating an association between said virtual container and other ones of said plurality of virtual containers; allocating a memory storage area for storing a payload of said virtual container; inputting said virtual container payload into said memory area; and reading said data from said memory area in parallel with data read from other said memory areas corresponding to payloads of other said virtual containers of said plurality of virtual containers.

Said step of, for each virtual container, reading data in parallel with data of other virtual containers may comprise: for each said memory area, setting a read pointer to a memory location of said memory area; wherein said plurality of read pointers are set to said memory locations such that successive bytes of said data frame are read from said plurality of memory locations in sequence. A said data frame may be assembled from said parallel read data. A said data frame comprises an OSI layer 2 data frame. The invention includes a method of recovering a data block carried in a plurality of payloads of a plurality of associated synchronous digital hierarchy virtual containers, said method comprising steps of: receiving a plurality of streams of said plurality of associated virtual containers; for each said received virtual container stream allocating a corresponding respective memory area for storage of data payloads of virtual containers of said stream; storing said plurality of virtual container payloads in said corresponding allocated memory areas; and reading individual bytes of said

plurality of stored virtual container data payloads in sequence to reconstruct said data block.

Preferably said step of reading individual bytes of said plurality of payloads
 5 comprises: for each said memory area, setting a read pointer to a memory location corresponding to a next data byte of said data block to be read, contained within that data payload; and reading said data byte once a preceding data byte of said data block has been read from a memory location of another said memory area. Said bytes are preferably read from each of a plurality of said
 10 memory areas in which said virtual container payloads are stored.

The invention includes apparatus for recovering data from a plurality of synchronous digital hierarchy virtual containers containing said data, said means comprising: a random access memory configured into a plurality of individual
 15 memory areas allocated for storage of payloads of said plurality of virtual containers; a data processor means operating to identify an association data of said virtual containers, said association data indicating an association of said plurality of virtual containers; and means for generating a plurality of read pointers operating to successively read a plurality of memory locations of said memory
 20 areas for recovering said data from said plurality of virtual containers.

Brief Description of the Drawings

For a better understanding of the invention and to show how the same may be carried into effect, there will now be described by way of example only,
 25 specific embodiments, methods and processes according to the present invention with reference to the accompanying drawings in which:

Fig. 1 illustrates schematically a prior art synchronous digital hierarchy STM-N frame;

Fig. 2 illustrates schematically the prior art SDH multiplexing hierarchy;

30 Fig. 3 illustrates schematically details of a regenerator section overhead, a multiplex section overhead, and a plurality of administrative unit (AU) pointers comprising a header of the STM-N frame of Fig. 1 herein;

Fig. 4 illustrates schematically a section of a synchronous network over which is carried an OSI layer 2 datacoms channel between first and second
 35 computing devices;

Fig. 5 illustrates schematically a protocol stack for carrying an OSI layer 2 data channel over a synchronous digital network;

Fig. 6 illustrates schematically an OSI layer 2 port card for interfacing between OSI layer 2 apparatus and synchronous digital network elements;

Fig. 7 illustrates schematically a differential delay problem which may occur with a plurality of virtual containers transmitted over a synchronous digital network between source and destination nodes by a plurality of different routes;

Fig. 8 illustrates schematically a plurality of virtual containers which are
5 virtually concatenated with each other to form an effective container for an OSI layer 2 data frame payload;

Fig. 9 illustrates schematically components of an OSI layer 2 port as illustrated in Fig. 6 herein, operating to fill a plurality of virtually concatenated virtual containers, each virtual container being of a lower bit rate, with a higher bit
10 rate OSI layer 2 data frame;

Fig. 10 illustrates schematically how an OSI layer 2 data frame of a higher bit rate is carried in a plurality of virtually concatenated virtual containers by byte interleaving the OSI layer 2 data frame between payloads of the virtual containers;

Fig. 11 illustrates schematically process steps of a transmit process carried out by the port apparatus of Fig. 6;

Fig. 12 illustrates schematically how a pair of virtual containers may arrive with a differential delay at a destination port apparatus, the pair of virtual containers arriving in a first order;

Fig. 13 illustrates schematically how a pair of virtual containers may arrive with a differential delay at a destination port apparatus, the pair of virtual containers arriving in a second order;

Figs. 14 to 17 illustrate schematically how a pair of virtual containers arriving at a destination port apparatus with a differential delay are processed for recovery of an OSI layer 2 data frame from the payloads of the pair of virtual
25 containers;

Fig. 18 illustrates schematically a process for receiving a plurality of associated virtual containers comprising a virtual concatenation of virtual containers at a destination port;

Fig. 19 illustrates schematically a process for extraction and re-assembly of an OSI layer 2 data frame from the payloads of a plurality of received associated virtual containers comprising a virtual concatenation of virtual containers; and

Fig. 20 illustrates schematically components of an OSI layer 2 port for receiving virtual containers and recovering OSI layer 2 data frames from a
35 plurality of virtually concatenated virtual containers

Detailed Description of the Best Mode for Carrying Out the Invention

There will now be described by way of example the best mode contemplated by the inventors for carrying out the invention. In the following

description numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent however, to one skilled in the art, that the present invention may be practiced without limitation to these specific details. In other instances, well known methods and structures have not been described in detail so as not to unnecessarily obscure the present invention.

In the following description there is used an example of a stream of OSI layer 2 data frames being transported over a plurality of streams of virtual containers as an example of the payload carried by a plurality of virtual concatenated virtual containers. However, it will be understood by a person skilled in the art that any data payload can be carried by a plurality of virtually concatenated virtual containers, and the advantages of the invention are most apparent for a data payload which has a data rate which is too fast to be carried in a nearest data rate virtual container (eg data 5% or more faster than a nearest equivalent virtual container data rate under ITU-T recommendation G.707), but which inefficiently fills a next higher up data rate virtual container (eg the data rate of the transported data is 30% or more slower than the higher data rate of the next available virtual container in which it could be carried).

Referring to Fig. 1 herein, there is illustrated schematically a prior art synchronous digital hierarchy (SDH) synchronous transfer mode frame. The STM frame has a duration of 125 μ s, and comprises a string of serially transmitted data bytes, which can be drawn schematically in two dimensions as a (270 x N) column x 9 row byte array as shown in Fig. 1 herein. Within the basic STM-N frame structure, a first 9 columns of the frame comprise a "section overhead" area 100, and the remaining 261 columns comprise payload area 101, in which data is carried. The STM-N frame forms the basis of the SDH multiplexing scheme as specified in ITU-T recommendation G.70X, which incorporates a set of different multiplexed data rates in the range 1.544 Mbits/s to 622 Mbits/s and above, the lower bit rates being multiplexed to higher bit rates according to the SDH hierarchy as shown schematically in Fig. 2 herein, as is well-known to those skilled in the art. In this specification, references to synchronous digital hierarchy multiplexing includes the synchronous optical network (SONET) options, as will be understood by those skilled in the art, and SONET options may be referred to in parentheses after description of SDH features.

At each level of the SDH multiplex hierarchy, data is carried in the STM-N payload section 101 of the STM-N frame. For example, the basic transmission rate defined in the SDH standards for an STM-1 frame is 155.520 MBits/s. The STM-1 frame consists of 2,430 8 bit bytes which corresponds to a frame duration of 125 μ s. Three higher bit rates are also defined: 622.08 MBits/s (STM-4), 2488.32 MBits/s (STM-16) and 9,953.28 MBits/s (STM-64). The higher bit rates are achieved by interleaving on a byte by byte basis a number N of the basic STM-1 frames.

The 2,430 byte payload section of an STM-1 frame, carries a plurality of virtual containers (VCs). Each virtual container comprises a plurality of data bytes divided into a path overhead component and a payload component. Various types of virtual container are defined in ITU-T recommendation G.70X, including VC-1, VC-2, VC-3, VC-4, VC-12. For VC-1 and VC-2, the path overhead bits comprise bits which are used for error performance monitoring and network integrity checking.

A VC-3 comprises an 85 byte column x 9 row byte structure. For the VC-3 container, the path overhead component is located in a first column of the 9 row x 85 column structure and includes bytes which verify a VC-3 path connection; a byte which provides bit error monitoring, a signal label byte indicating a composition of the VC-3 payload; a path status byte allowing the status of a received signal to be returned to a transmitting end; a plurality of path user channel bytes to provide a user specified communication channel; a position indicator byte for providing a generalized position indicator for payloads; an automatic protection switching byte; a national operator byte which is allocated for specific management purposes such as tandem connection maintenance; and a plurality of spare bytes.

A VC-4 container comprises a 261 byte column x 9 byte row structure, having similar path overhead byte functions as for a VC-3 container as described above.

A plurality of virtual containers are incorporated into an STM-1 frame as follows. Firstly, the virtual container is positioned in a tributary unit (TU), or an administrative unit (AU) with a pointer indicating the start of the virtual container relative to the tributary unit or administrative unit as appropriate. VC-1s and VC-2s are always positioned in tributary units, whereas VC-4s are always positioned in an AU4 administrative unit. Tributary units and administrative units are each

5 bundled into their respective groups: tributary unit groups (TUGs) for tributary units, and administrative unit groups (AUGs) for administrative units. Tributary unit groups are multiplexed into higher order virtual containers which in turn are positioned in administrative units with a pointer indicating the start of the virtual container relative to the administrative unit. Administrative unit pointers indicate the position of the administrative units in relation to the STM-1 frame, and form part of the section overhead area of the frame.

10 Referring to Fig. 3 herein, there is illustrated schematically in more detail the 9 byte column x 9 row STM-1 section overhead of an STM-1 frame, showing the position at which AU pointers for the VCs which comprises the payload of the STM-1 frame are positioned within the STM-1 frame.

15 A system for sending and recovering frame data over an SDH network according to the best mode implementation of the present invention will now be described.

20 Referring to Fig. 4 herein, there is illustrated schematically a section of a synchronous digital hierarchy (SDH) network comprising: an STM-fiber ring 400 connecting a plurality of add-drop multiplexers 401-403, each multiplexer having a plurality of telecoms tributaries 404, for example E1 tributaries operating at 2 MBits/s; first and second multiplexers 401, 402 respectively at first and second locations A, B, each comprise a corresponding respective first or second OSI layer 2 datacoms port card 405, 406; first and second datacoms routers 407, 408
25 connected to said respective first and second datacoms port cards 405, 406 of the first and second multiplexers; and communicating with the datacoms routers, a plurality of computing devices, for example personal computers, mini computers etc, 409, 410.

30 The embodiment of Fig. 4 herein illustrates schematically an OSI layer 2 datacoms channel carried over a synchronous digital hierarchy ITU-T recommendation G.701 type network between first and second locations A, B. First and second datacoms routers and first and second synchronous multiplexers may be located at, for example, a pair of geographically separated customer premises, thereby providing an OSI layer 2 data channel over a relatively wide area. The implementation of Fig. 4 may provide a functionality equivalent to what has historically in the prior art been regarded as local area network, ie OSI layer 2 datacoms system data rates and reliability, but over a geographical area which has historically been considered to be provided by a
35

wide area network, ie over a range of from the order of a few kilometers to thousands of kilometers.

5 Datacoms frame based data is incorporated into synchronous virtual containers by the datacoms port cards of the synchronous multiplexers. The datacoms port cards are not restricted to inclusion in add-drop multiplexers, but may be incorporated in any synchronous digital multiplexer, for example an SDH terminal multiplexer.

10 Referring to Fig. 5 herein, there is illustrated schematically protocol stacks operating within the computing devices 409, 410, first and second datacoms routers 407, 408, first and second datacoms port cards 405, 406 and first and second multiplexers 401, 402 at first and second locations A, B. Internet protocol packets in Internet protocol layer 500 are entered into OSI layer 2 datacoms data frames in OSI layer 2 protocol 501, as is conventionally known in the art. OSI layer 2 datacoms carried IP packets are incorporated into SDH virtual containers in SDH protocol layer 502 at the port cards, and are carried across SDH channel 503. De-layering of the virtual containers occurs by traversing the protocol stacks in an opposite direction.

20 By incorporating OSI later 2 data frames directly into synchronous digital hierarchy ITU-T recommendation G.701 channels, the high data rates available using OSI layer 2 frames can be provided in a geographically widespread system, which is unlimited by the conventional distance limitations imposed on prior art local area network systems.

25 However, there exists the practical problem of how to incorporate and extract OSI layer 2 data frames, which are generated at a first set of bit rates with SDH virtual containers which are defined to operate at a second set of bit rates.

30 Table 1 herein illustrates a comparison of Ethernet data rates (in a left column of Table 1) as an example of OSI layer 2 data rates, with nearest available SDH virtual container rates (in the central column of Table 1), and how the Ethernet data rates can be accommodated in a plurality of SDH virtual containers (in the right column of table 1). In general, the Ethernet data rates are at higher bit rates than the nearest available bit rate virtual containers. However, the prior art Ethernet data rates are well matched to integer multiples of the synchronous digital hierarchy virtual container payload data rates, as illustrated in Table 1. The SDH payload data rates have a granularity of a minimum incremental step of ~ 2 MBits/s. A minimum granularity of Ethernet rates is 10 MBits/s, and so 5

SDH VC-12 containers each of 2 MBits/s can accommodate neatly a single 10 MBits/s Ethernet channel. Similarly, a 100 MBits/s Ethernet data rate can be accommodated in 2 VC-3 containers, each of approximately 50 MBits/s.

5 Table 1

Ethernet	Virtual Containers	Multiple Virtual Containers
10 MBits/s	VC-12 (~2 MBits/s)	1-5 x VC-12 (2 MBits/s – 10 MBits/s)
10 MBits/s	VT	1-8 x VT 1-5 (2MBits/s – 10 MBits/s)
100 MBits/s	VC-3 (~50 MBits/s)	1-2 x VC-3 (50 MBits/s – 100 MBits/s)
100 MBits/s	STS-1	1-2 x STS-1 (50 MBits/s – 100 MBits/s)
1Gbits/s	VC-4 (~155 MBits/s)	N x VC-4(155 MBits/s – 1 . 2 GBits/s)
	VC-4 –4c (622 MBits/s)	N = 1– 8
1 GBits/s		N x STS-1 (155 MBits/s – 1 . 2 GBits/s)
		N = 3, 6, 9, 12, 15, 18, 21, 24

Referring to Fig. 6 herein, there is illustrated schematically components of an OSI layer 2 datacoms port card comprising a synchronous digital multiplexer. The datacoms port card is incorporated into a synchronous digital hierarchy multiplexer (or a SONET multiplexer), so that as well as having a plurality of tributary interfaces for telecoms channels, for example E1, T1, STM-1, the multiplexer also has an interface for frame based data systems, as illustrated in Fig. 6 herein.

The datacoms port card of Fig. 6 herein comprises a conventional OSI layer 2 datacoms physical port 603, the datacoms physical port communicating with a router of a datacoms OSI layer 2 frame switch 602 (eg a conventional Ethernet frame switch, such as available from Plaintree, MMC) or directly with a computer; a rate adaption means 601 for adapting between OSI layer 2 datacoms rates and SDH rates equivalent to the rates of the virtual containers; and an SDH payload mapper 600 for mapping datacoms frames into one or more SDH payloads. Rate adaption means 601 and SDH payload mapper 600 may be implemented as a field programmable gate array (FPGA) or an application specific integrated circuit (ASIC).

Rate adaption means 601 comprises an OSI layer 2 datacoms port, eg operating at 10 MBits/s or 100 MBits/s in accordance with IEEE standard 802.3; and a synchronous port operating at 2 MBits/s, 50 MBits/s or 100 MBits/s communicating with SDH payload mapper 600. Rate adaption means 601

comprises a through channel for adapting OSI layer 2 data frames into bitstreams having an appropriate data rate of 2 MBits/s, 50 MBits/s or 100 MBits/s.

5 The function of the rate adaption means is to handle the frequency difference between an exact data rate at the OSI layer 2 port and an approximate rate achieved over a plurality N of virtual containers.

10 SDH payload mapper 600 maps OSI layer 2 datacoms data frames directly into SDH data frames.

Further details of construction and operation of payload mapper 600 will now be described.

15 The datacoms port card of Fig. 6 herein adapts the OSI layer 2 datacoms data frames to a data rate which matches a data rate which can be multiplexed into a virtual container, and maps each OSI layer 2 data frame into one or more SDH virtual containers directly and without any further encapsulation in intermediate protocols. For example, a 10 MBits/s Ethernet channel may be mapped onto 5 VC-12 containers, each VC-12 container having a data rate of ~2
20 MBits/s. The 5 VC-12 containers are concatenated together to carry the 10 MBits/s Ethernet channel. For entry of a 100 MBits/s Ethernet channel into the synchronous network, a single 100 MBits/s Ethernet channel may be mapped into 2 concatenated VC-3 containers each having a capacity of ~50 MBits/s. To carry an Ethernet 1 GBits/s channel over a synchronous network, the Ethernet
25 channel may be mapped into 7 VC-4 containers, each having a capacity of ~155 MBits/s.

30 A method and apparatus for directly mapping frame based data as described above, directly into synchronous digital virtual containers, is described in the applicant's co-pending US patent application reference ID 0889 filed contemporaneously with the present application, and entitled "Payload Mapping in Synchronous Networks". Data frames are mapped into SDH VCs without encapsulation in an intermediate protocol, in a manner in which data frames carried within synchronous digital frames are identifiable as such, through
35 provision of start and/or boundary markers delineating data frame packets contained within synchronous digital frames, and by other encoding schemes used to distinguish data frame packets from other data traffic carried within synchronous digital frames. Identification of frame data packets within a

synchronous digital frame is disclosed, maintaining a known packet transfer rate, and with limited and known packet size expansion.

SDH payload mapper 600 communicates with a bitstream channel of rate
5 adaption means 601. SDH payload mapper maps bitstream channel of rate
adaption means 601 into a plurality of SDH virtually concatenated virtual
containers.

10 However, where a plurality of virtual containers of lower bit rates are used to
carry a data frame of a higher bit rate, the higher rate data frame needs to be re-
assembled from the plurality of lower rate virtual containers at a destination end.

Referring to Fig. 7 herein, there is illustrated schematically a section of an
SDH network comprising first to fourth nodes 700-703. Virtual containers 704,
15 705 sent from first node 700 and destined for third node 702 may take different
paths to each other through the network, and thereby incur a different
transmission delay to each other, for example first container 704 may travel direct
from second node 701 to third node 702, whereas second container 705 may
travel from second node 701 via fourth node 703 to third node 702, thereby
20 incurring the additional delay of passage through fourth node 703 compared to
first container 704.

This problem occurs with conventional SDH virtual containers and does not
cause undue problem where the virtual containers are filled with data traffic from
25 an appropriate telecoms tributary of an appropriate data rate, for example a 2
MBits/s tributary in the case of a VC-12.

However, where a plurality of associated virtual containers containing a
single OSI layer 2 data frame are sent at substantially the same time from the first
30 node, the plurality of virtual containers carrying collectively a higher data rate OSI
layer 2 channel, the differential delay between a set of virtual containers
transmitted substantially at the same time from the first node over the network
becomes significant in re-assembly of the OSI layer 2 data frame. A set of virtual
containers carrying a higher bit rate OSI layer 2 channel which are sent from the
35 first node 701 simultaneously, may arrive at the destination node, third node 702
displaced in time.

Assuming that two virtual containers are used to accommodate an OSI
layer 2 data rate, the two virtual containers may leave a source as two streams of

virtual containers 1 and 2. At the source, the Nth frame of a virtual container in stream 1 and the Nth frame of the virtual container in stream 2 are generated simultaneously. However, at the destination, the Nth frame of one stream (1 or 2) could arrive coincident with the $N \pm X$ th frame of the other stream (where X is any arbitrary number).

Delays occur due to transmission delays along fiber links, and delays within the nodes themselves. A typical delay for a 125 μ s STM-1 frame at a node is 9 bytes per STM-1 frame. This gives a lowest time delay per node of the order of 5 μ s. Additionally, the delay incurred due to the transmission along optical fiber is of the order of 5 μ s per kilometer. Thus, if 2 VC-4 containers are sent across a network by different routes, having a round trip geographical distance difference of 1000 kilometers, the containers could arrive at the same destination 5 milliseconds apart due just to the difference in fiber delay between the two routes. This is in addition to any delays incurred through passing through additional nodes, which can be of the order of up to 50-100 μ s per node. A differential delay between source and destination over a large network of the order of 10 ms may be incurred.

The above delays do not occur for all virtual containers. For example for 2 VC-3s that run over the same physical route contained in the same VC-4, then the differential delay will be null (because the two VC-3s traverse the same route). On the other hand, where 2 VC-3s run over different routes, which could happen if a path protection switch only occurs on one VC, then the differential delay as described above may be incurred.

The problem is addressed in the best mode implementation herein by virtually concatenating a plurality of virtual containers at the send transmitter. In this specification, by virtual concatenation it is meant that the underlying network is unaware of any special relationship between the virtual containers which make up the group of associated virtual containers. No action is taken at intermediate nodes to suppress the differential delay between virtual containers, but rather that the responsibility for maintaining bit sequence integrity in the payload of a plurality of virtual containers is left with the terminating equipment.

The following example relates to the case where an OSI layer 2 data frame at a first data rate is contained within a pair of simultaneously created VC-3s, each having a second, lower, data rate, the 2 VC-3s being virtually concatenated together and transmitted on to a synchronous network simultaneously.

Referring to Fig. 8 herein, there are illustrated first and second streams of VC-3s 800, 801 respectively which are simultaneously created at a transmit apparatus. Each VC-3 payload comprises 84 x 9 bytes in 125 μ s, including the VC-3 path overhead bytes. The pair of VC-3 streams are created with timing to suit the local transmit equipment multi-frame synchronization, and may have a convenient pointer value. Each virtual container stream is identified by a virtual container stream number designated by a stream identification data comprising a byte in a designated position of the payload. For example, the first byte 800, 801 after the VC path overhead may be used to designate the virtual container stream number within the plurality of virtually concatenated VCs, eg stream number 1 in 800 and stream number 2 in 801. Additionally, to identify the sequence of virtual containers within a stream further sequence identification data A, B are added within the VC-3 payload. Stream number data and sequence data may or may not be located in the same byte. The sequence identification data A, B increment before resetting and then repeating as VC's are generated. The number of frames over which the sequence markers A, B must increment before resetting and repeating is determined by the maximum differential delay between VC's which may be expected. The sequence markers are incremented such that if the maximum differential delay expected is equivalent to a time taken to generate N VC-3 frames, then the incrementation markers must run over at least 2N+1 frames in a stream before repeating. The extra 1 frame over 2N frames is to allow for the payload bytes not being uniformly spread over the 125 μ s frame interval.

The virtual container stream numbers data indicate to which of a plurality of associated streams of virtual containers an individual virtual container belongs, whilst the sequence marker data indicates a time at which the virtual container was generated in relation to other previously and future generated virtual containers in the same stream and in associated other streams of virtual containers.

In the best mode described herein, the stream identification data and the sequence identification data (sequence markers) are incorporated in the VC payload section, preferably immediately after the VC overhead. However, in further alternative implementations, the path trace bytes present in the VC overhead may be used to identify a stream of virtual containers to which a particular virtual container belongs. The path trace byte is used conventionally to provide a 16 byte (or 64 byte in the case of SONET) identifier data for identifying

which particular circuits a virtual container belongs to, ie for example the 16 byte path trace overhead may be used for example by a network operator to check that they have correctly connected paths across a network, path trace bytes may be used to specify a source and destination location, a customer, and a bit rate of a path or connection. Provided each of a plurality of streams of virtual containers have a unique path trace byte data, then the path trace byte identification data may be used additionally as the stream identification data.

Similarly, in the further implementation the sequence identification data may also be incorporated in the path overhead of the virtual containers. Options for incorporating sequence identification data in the VC path overhead, include using part of the K3 byte in the VC path overhead for sequence identification purposes. In the prior art, the K3 byte of the VC overhead has bits 1-4 already allocated in ITU-T recommendations. However, bits 5-8 of the K3 byte are user definable and in the alternative specific implementation described herein, may be used for carrying the sequence identification data. However, use of the K3 byte would enable only short sequences of virtual containers to be implemented before repetition of the sequence cycle occurs, due to the low number of bits available. Secondly, a sequence identification data pattern may be incorporated over several virtual containers by utilizing one bit or more from the payload of each successive virtual container of a VC stream. In an extreme case, only one bit per VC overhead needs to be taken to implement the sequence pattern. A pattern of ones and zeroes collected from successive virtual containers of a steam may be decoded to give the information of where in the VC stream sequence, a particular virtual container occurs. However, this implementation requires collection of a plurality of virtual containers in order to determine the start and finish of a sequence. By using appropriate prior art sequences, it is theoretically possible to cater for theoretically infinite delays between received virtual containers from different streams. Additionally, the scheme may be vulnerable to bit errors in the sequence bits. In this alternative implementation, efficiency is improved over the first implementation, since no payload data needs to be displaced by the association data, however the hardware and software required for identifying sequences in the second implementation herein becomes more complex and a larger number of virtual containers need to be received before sequence identification can commence.

Referring to Fig. 9 herein, there is illustrated schematically part of a transmit apparatus for constructing a plurality of virtually concatenated virtual containers, for carrying an OSI layer 2 data frame. Virtual container generator 900

continuously outputs a plurality of virtual containers in parallel. Virtual concatenator 901 adds a plurality of virtual concatenation overhead bytes containing the stream numbers and sequence markers just referred to. Mapping means 902 maps OSI layer 2 data frames to the plurality of virtual containers which are associated with each other by addition of virtual concatenation overhead bytes. In the example of Fig. 9, there is shown an input data stream of OSI layer 2 data frames at a bit rate of 100 Mbits/s (eg a 100Mbits/s Ethernet data frame). The OSI layer 2 data frame is distributed amongst a plurality of VC-3s (2 in this case) 903, 904 each having a data rate of 50 Mbits/s, which are launched in parallel onto a synchronous digital network.

Incorporation of the OSI layer 2 data frame into the plurality of virtual containers is by byte interleaving as illustrated schematically in Fig. 10 herein. A first byte of the OSI layer 2 data frame is input into the payload of first VC-3, a second byte of the OSI layer 2 data frame is input into the payload of the second VC-3, a third byte of the data frame is input into the payload of the first VC-3, a fourth byte of the data frame payload is input into the payload of the second VC-3, and so on, so that alternate bytes of the OSI layer 2 data frame are distributed between the payloads of the first and second VC-3s respectively. Each VC-3 is generated with a bit rate of the order 50 Mbits/s. By distributing the 100 Mbits/s OSI layer 2 data frame between 2 VC-3s, which are associated with each other by virtue of the added virtual concatenation overhead bytes the 100Mbits/s OSI layer 2 data frame is carried directly in the payload of the VC-3s over a synchronous network. At the transmit apparatus, a plurality of virtually concatenated VC-3 payloads are effectively treated as if they were a single payload, into which an OSI layer 2 data frame is input.

Referring to Fig. 11 herein, there is illustrated schematically steps in a method carried out by the transmit apparatus, which are carried out in real time and continuously as OSI layer 2 data frames are input into payloads of a plurality of virtually concatenated virtual containers. In step 1100, there are continuously generated a plurality of parallel virtual containers, which are associated together by means of virtual concatenation overhead bytes in step 1101. In step 1102, OSI layer 2 data frames are input and buffered in real time in a first in first out buffer. Bytes of data from the buffered OSI layer 2 data frame are byte interleaved into a plurality of virtual containers in parallel in step 1103. In step 1104 a plurality of virtually concatenated virtual containers are output in parallel onto a synchronous digital transmission network at the same time.

At a destination end, the first and second VC-3s may arrive with a differential delay, as illustrated schematically in Fig. 12 herein. First VC-3 stream 903 may arrive before second VC-3 stream 904 as illustrated schematically in Fig. 12, or alternatively first VC-3 stream 903 may arrive after second VC3 stream 904 as illustrated schematically in Fig. 13 herein. In each of Figs. 12 and 13, for ease of illustration, a differential delay between the arrivals of first and second VC-3s of less than one frame (125 μ s) is shown. However, in general the differential delay may be anything up to 10 ms as described previously.

Referring to Figs. 14 to 17 herein, there is illustrated schematically a receive operation at a destination device, whereby a pair of VC-3 streams which have experienced differential delays over a transmission network arrive at the device at different times. Received virtual containers are fed into a memory device as they are recovered from their STM frames. As soon as an arriving virtual container is received the virtual concatenation overhead bytes of the VC payload are read to extract the stream identification data and sequence identification data which determine the memory location to which the VC should be written. Separate areas of the memory device are set aside for reception of a plurality of virtual containers in parallel. For example, for the receipt of 2 VC-3 containers 903, 904 separate memory areas are allocated to those two virtual containers. The memory is divided into two for the two streams 1 and 2. Each half is then divided to accommodate the sequence of VC-s A to X. When the sequence repeats the memory is over written. For example in Fig. 14, first and second VC-3s 903, 904 respectively are directed to first and second memory areas 1400, 1401 respectively as soon as they are received. Since one virtual container is received before another, memory locations in area 1400, will be written to before memory locations in area 1401.

As the virtual containers arrive, their contents are stored in the appropriate memory areas in parallel in real time. For ease of illustration a case of two virtual containers which arrive within a differential delay of 125 μ s is shown in Figs. 14 to 17 herein. There is illustrated schematically at different times T1-T4 how the pair of VC-3s are loaded into the corresponding memory areas at these times. In Fig. 14, at time T1 the pair of VC-3s have not yet arrived, and therefore no bytes of these VC-3s are stored in the memory device. In Fig. 15 at time T2 the first VC has arrived at the destination, and the virtual concatenation of bytes of a first few bytes of the first VC-3 903 has been stored in first memory area 1401, beginning at P1. P2 indicates where the VC-3 of stream 2, frame A will be stored when it arrives. In Fig. 16, both first and second VC-3s are arriving at the destination end

09166814-100698

in parallel at time T2. A greater number of received payload bytes are stored in the first memory area 1401 for the first VC-3 than are stored in the second memory area 1400 for the second VC-3. The remaining portions of first VC-3 903 and second VC-3 904 have yet to arrive at the destination equipment. In Fig.

5 17, there is illustrated at time T4, the memory area after arrival of both the first and second VC-3s. Both VC-3s have been completely received and stored in their corresponding respective memory areas. At this time the next VC frame (B in the sequence) of stream 1 is being written in another memory location.

10 The overall parallel process for receiving VCs operated at the destination apparatus is illustrated schematically in Fig. 18 herein. In step 1800, first VC reception begins and in step 1801, the first few bytes containing the virtual concatenation overhead is read. In step 1802 there are decoded the virtual concatenation overhead data bytes of the first received virtual container which
15 associate the VCs together. A plurality of memory locations are allocated, each corresponding to an anticipated received virtual container of the plurality of associated (virtually concatenated) virtual containers. In step 1804, the arriving virtual containers are directed to their corresponding respective reserved memory areas, according to stream and sequence number read from the virtual
20 concatenation overhead.

Referring again to Figs. 14 to 17 herein, there is now described a method of reconstituting an OSI layer 2 data frame from the plurality of received virtually concatenated virtual containers.

25 Referring again to Figs. 14 to 17 herein there is illustrated how an OSI layer 2 data frame payload of first and second virtually concatenated VCs is reassembled upon receipt of the pair of VCs at a destination apparatus having a port as described in Fig 6 herein. On receipt of first incoming VC 903, a plurality
30 of memory areas are reserved for the association of VCs forming the virtual concatenation of VCs. Once bytes from both the first and second VCs with the same sequence number are received, re-assembly of the OSI layer 2 data frame may commence. A first pointer P1 is set to a memory location of first memory area 1400 containing a first byte of the first VC with the sequence number to be
35 processed, and similarly, a second pointer P2 is set to a second memory location of second memory area 1401 corresponding to a first received byte of the second VC with the same sequence number as illustrated schematically in Fig. 15 herein.

As the first and second memory areas fill up with received bytes of the respective first and second VCs, alternate bytes from the first and second VCs are read by moving the read pointer along the memory locations in parallel and reading alternate byte interleaved data comprising the OSI layer 2 data frame from the payloads of the first and second VCs. The earliest time at which reading can commence limited by the latest time at which the latter arriving of the first and second VCs with the same sequence marker begins to be stored in the memory.

Referring to Fig. 19 herein, there are illustrated schematically process steps for re-assembly of an OSI layer 2 data frame from a plurality of VC payloads received at a destination receiving apparatus. In step 1900, the initial payload bytes of a first virtual container are received and in step 1901 a first pointer is set to a memory location corresponding to the initial bytes of the first VC payload. In step 1902, initial payload bytes of a second VC are received and stored in a second memory location. In step 1903, a second pointer is set to a memory location corresponding to the start of the second virtual container with the same sequence marker as the first. The first and second pointers are moved in parallel with each other in steps along successive memory locations containing successive payload bytes of the first and second VC payloads in step 1904, allowing reading of alternate bytes from the first, second, first, second, first, second pointers and so on, in step 1705. The OSI layer 2 data frame is assembled in real time as the virtual containers arrive from the interleaved bytes read from the memory locations of the first and second pointers P1, P2 in step 1906.

In a best mode implementation for performing the read operation, each memory area allocated to a virtual container stream is preferably large enough to contain enough bytes corresponding to twice the maximum anticipated differential delay between arrival of two virtual containers. Although this implementation is inefficient of memory usage, in that only enough memory to accommodate the different delay is required in theory, operation is simplified.

Referring to Fig. 20 herein, there is illustrated schematically components of an OSI layer 2 port for recovering a stream of OSI layer 2 data frames 2000, 2001 from a plurality of streams of incoming virtual containers 2003. The components comprise a random access memory 2004 divisible into a plurality of memory areas, each containing a payload of an incoming virtual container; a data processor means configured for operating as a virtual container virtual concatenation overhead byte analyser 2005 for reading virtual concatenation

overhead bytes of the plurality of virtual containers and determining from those bytes the memory locations in which the payload data is stored, and a read point generator 2007, receiving inputs from the virtual concatenation overhead byte analyser operating to generate read pointers for the appropriate memory location to be read. The read pointer generator 2007 generates a plurality of read pointers which each address a specific identified memory location within each memory area, the memory locations to which the read pointers are set being selected such that reading those pointed to memory locations in sequence recovers the OSI layer 2 data frame sequentially. A plurality of memory areas have their individual memory locations read contiguously so as to recover the OSI layer 2 data frames from the plurality of virtual containers which may be received at the OSI layer 2 port non-contiguously, having a differential delay there between.

15

09166814 100698

Claims:

1. A method of transporting data over a synchronous digital network, said method comprising the steps of:
- 5 generating in parallel a plurality of synchronous virtual containers, each at a lower bit rate than a bit rate of said data, each said virtual container having a payload section;
- associating said plurality of virtual containers with each other by means of assigning association data describing said association into said plurality of virtual containers;
- 10 inputting said transported data into said payloads of said plurality of virtual containers; and
- outputting said plurality of associated virtual containers onto a synchronous digital network.
- 15 2. The method as claimed in claim 1, wherein said plurality of associated virtual containers are output onto said synchronous digital network substantially in parallel.
3. The method as claimed in claim 1, wherein said step of associating said plurality of virtual containers with each other comprises inserting said association data into a plurality of payloads of said plurality of virtual containers, said association data permitting recovery of the original association at a destination end.
- 20 4. The method as claimed in claim 1, wherein said step of inputting said transported data into said plurality of virtual containers comprises byte interleaving bytes of a frame of said transported data between said plurality of payloads.
- 25 5. The method as claimed in claim 1, wherein said plurality of virtual containers are generated as a plurality of streams of virtual containers and said step of associating said plurality of virtual containers with each other comprises associating a plurality of said streams of virtual containers with each other.
- 30 6. The method as claimed in claim 1, wherein said plurality of virtual containers are generated as a plurality of streams of virtual containers, and said step of associating said plurality of virtual containers together by means of assigning association data comprises adding a stream of identification data to
- 35

09166814-100698

each said virtual container, said stream identification data identifying which of said plurality of streams said virtual container belongs to.

7. The method as claimed in claim 1, wherein said plurality of virtual
5 containers are generated as a plurality of streams of virtual containers and said
step of associating said plurality of virtual containers together by means of
assigning association data comprises including a sequence identification data to
individual ones of said plurality of virtual containers, said sequence identification
10 data designating a sequence in which said individual virtual containers are
generated with respect to each other.

8. The method as claimed in claim 7, wherein said plurality of virtual
containers are generated as a plurality of streams of virtual containers and said
15 step of associating said plurality of virtual containers together by means of
assigning association data comprises assigning to individual ones of said plurality
of virtual containers a sequence identification data comprising a cyclically
repeating code data.

9. The method as claimed in claim 1, wherein said plurality of virtual
20 containers are generated as a plurality of streams of virtual containers and said
step of associating said plurality of virtual containers together by means of
assigning association data comprises assigning to individual ones of said plurality
of virtual containers a cyclically repeating code sequence having a repetition
25 period of at least $2N+1$, where N is the repetition number of sequentially received
virtual container payloads in a single stream.

10. The method as claimed in claim 1, wherein the said plurality of
virtual containers are generated as a plurality of virtual container streams and
said step of associating said plurality of virtual containers together by means of
30 assigning association data comprises utilizing a path trace byte in a virtual
container overhead as a stream identifier data for identifying a virtual container as
belonging to a particular said virtual container stream.

11. The method as claimed in claim 1, wherein a said plurality of virtual
35 containers are generated as a plurality of streams of virtual containers and said
step of associating said plurality of virtual containers together by means of
assigning association data bytes comprises including a sequence identification
data in individual ones of said plurality of virtual containers, said sequence
identification data designating a sequence in which said individual virtual

container is generated within a said stream of virtual containers, said sequence identification data being carried within a K3 byte of an overhead section of said virtual container.

5 12. The method as claimed in claim 1, wherein said plurality of virtual containers are generated as a plurality of streams of virtual containers and said step of associating said plurality of virtual containers together by means of assigning association data comprises assigning to individual ones of said plurality of virtual containers a sequence identification data comprising a code data
10 extending over a plurality of said virtual containers of a said stream, for identifying a position of each said virtual container within said virtual container stream.

 13. Apparatus for incorporating data input at a first data rate into a plurality of streams of synchronous digital hierarchy virtual containers each output
15 at a second data rate, said apparatus comprising:
 means for continuously generating a plurality of virtual containers in parallel;
 means for generating data describing an association of said plurality of virtual containers, and for assigning said association data to said plurality of associated virtual containers; and
20 means for inserting said first data rate data into said plurality of payloads of said plurality of virtual containers.

 14. A method of recovering data from a plurality of synchronous virtual containers, said method comprising the steps of:
25 receiving said plurality of virtual containers;
 identifying an association data from said plurality of virtual containers, said association data indicating an association between individual ones of said plurality of virtual containers;
 reading data bytes from each payload of said plurality of associated virtual
30 containers; and
 re-assembling said data from said plurality of read payload data bytes.

 15. The method as claimed in claim 14, wherein said process of reading said data payloads comprises reading a plurality of said payloads in a
35 byte interleaved manner.

 16. The method as claimed in claim 14, wherein said step of identifying an association data from each of said plurality of virtual containers comprises reading a plurality of stream identification data from said plurality of virtual

containers, said stream identification data designating which of a plurality of streams of virtual containers said virtual containers belong to.

17. The method as claimed in claim 14, wherein said step of identifying
5 an association data between said plurality of virtual containers comprises reading a plurality of sequence identification data designating where in a sequence of virtual containers each individual virtual container belongs.

18. The method as claimed in claim 14, wherein said step of receiving
10 a plurality of said virtual containers comprises receiving a plurality of separate streams of associated virtual containers simultaneously.

19. The method as claimed in claim 14, wherein said step of reading
15 data bytes from each payload of said plurality of associated virtual containers comprises reading said data bytes substantially in parallel from a plurality of virtual containers of a same sequence identification from a plurality of associated virtual container streams.

20. The method as claimed in claim 14, wherein said step of receiving
20 a plurality of said virtual containers comprises receiving a plurality of separate streams of associated virtual containers, and said step of identifying an association data from said plurality of virtual containers comprises inspecting a path trace byte of each of a plurality of said virtual containers, and distinguishing from which of a set of said streams of virtual containers said individual virtual
25 containers belong, from said read path trace data bytes.

21. The method as claimed in claim 14, wherein said step of receiving
a plurality of virtual containers comprises receiving a plurality of separate streams of associated virtual containers, and said step of identifying an association data
30 from said plurality of virtual containers comprises reading a plurality of sequence identification data designating where in a stream of said virtual containers, a said virtual container belongs, said sequence data being read from a K3 byte of a said virtual container.

22. A method of recovering data carried in payloads of a plurality of
35 associated synchronous digital hierarchy virtual containers, said method comprising the steps of:
for each said virtual container:

09166814-100698

reading data indicating an association between said virtual container and other ones of said plurality of virtual containers;

allocating a memory storage area for storing a payload of said virtual container;

5 inputting said virtual container payload into said memory area; and

reading said data from said memory area in parallel with data read from other said memory areas corresponding to payloads of other said virtual containers of said plurality of virtual containers.

10 23. The method as claimed in claim 22, wherein a said data frame is distributed between said plurality of virtual containers and said step of, for each virtual container, reading data in parallel with data of other virtual containers comprises:

15 for each said memory area, setting a read pointer to a memory location of said memory area;

wherein said plurality of read pointers are set to said memory locations such that successive bytes of said data frame are read from said plurality of memory locations in sequence.

20 24. The method as claimed in claim 22, further comprising the step of assembling said data frame from said parallel read data.

25 25. The method as claimed in claim 22, wherein said data frame comprises an OSI layer 2 data frame.

26. A method of recovering a data block carried in a plurality of payloads of a plurality of associated synchronous digital hierarchy virtual containers, said method comprising steps of:

30 receiving a plurality of streams of said plurality of associated virtual containers;

for each said received virtual container stream allocating a corresponding respective memory area for storage of data payloads of virtual containers of said stream;

35 storing said plurality of virtual container payloads in said corresponding allocated memory areas; and

reading individual bytes of said plurality of stored virtual container data payloads in sequence to reconstruct said data block.

27. The method as claimed in claim 26, wherein said step of reading individual bytes of said plurality of payloads comprises;

for each said memory area, setting a read pointer to a memory location corresponding to a next data byte of said data block to be read, contained within
5 that data payload; and

reading said data byte once a preceding data byte of said data block has been read from a memory location of another said memory area.

28. The method as claimed in claim 26, wherein said step of reading
10 individual bytes of said plurality of payloads comprises reading bytes from each of a plurality of said memory areas in which said virtual container payloads are stored.

29. Apparatus for recovering data from a plurality of synchronous digital
15 hierarchy virtual containers containing said data, said means comprising:

a random access memory configured into a plurality of individual memory areas allocated for storage of payloads of said plurality of virtual containers;

a data processor means operating to identify an association data of said
20 virtual containers, said association data indicating an association of said plurality of virtual containers; and

means for generating a plurality of read pointers operating to successively read a plurality of memory locations of said memory areas for recovering said data from said plurality of virtual containers.

09166814 "100699

Abstract**CONCATENATION OF CONTAINERS IN SYNCHRONOUS DIGITAL HIERARCHY NETWORK**

5 A method of transmitting OSI layer 2 datacoms data by direct incorporation
into a plurality of synchronous digital hierarchy virtual containers is disclosed, in
which a higher bit rate OSI layer 2 data frame is multiplexed into a plurality of
lower bit rate SDH (or SONET) virtual containers, which are transmitted
simultaneously and in parallel over a synchronous communications network. The
10 plurality of virtual containers are virtually concatenated by association of the
payloads of the plurality of virtual containers. Re-assembly of the OSI layer 2
data frames from a plurality of virtually concatenated VCs is achieved by storing
each received VC payload corresponding to an OSI layer 2 data frame in a
corresponding respective memory location, and alternately reading interleaved
15 bytes from the plurality of payloads under control of a plurality of read pointers.

09165814-100598

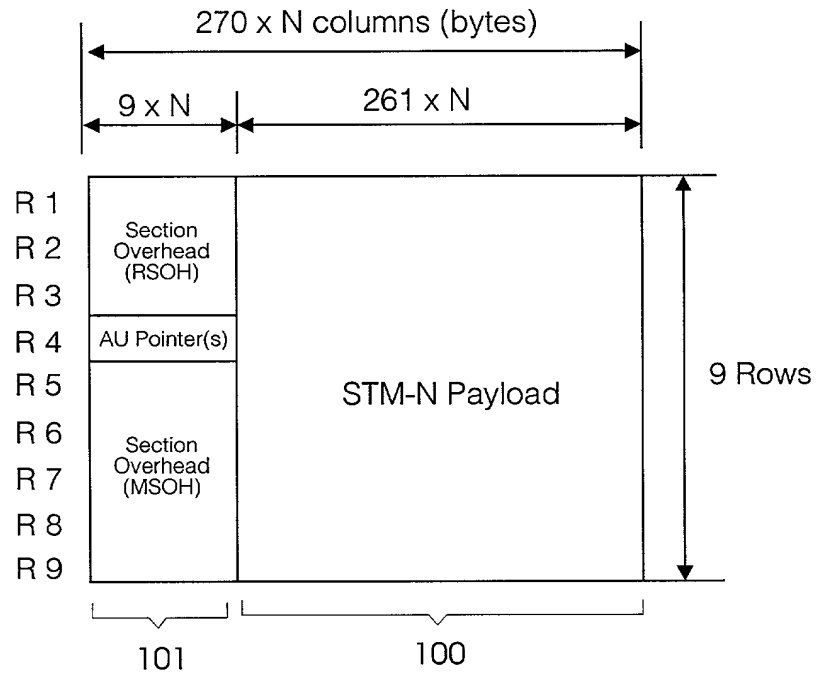


Fig. 1
(Prior Art)

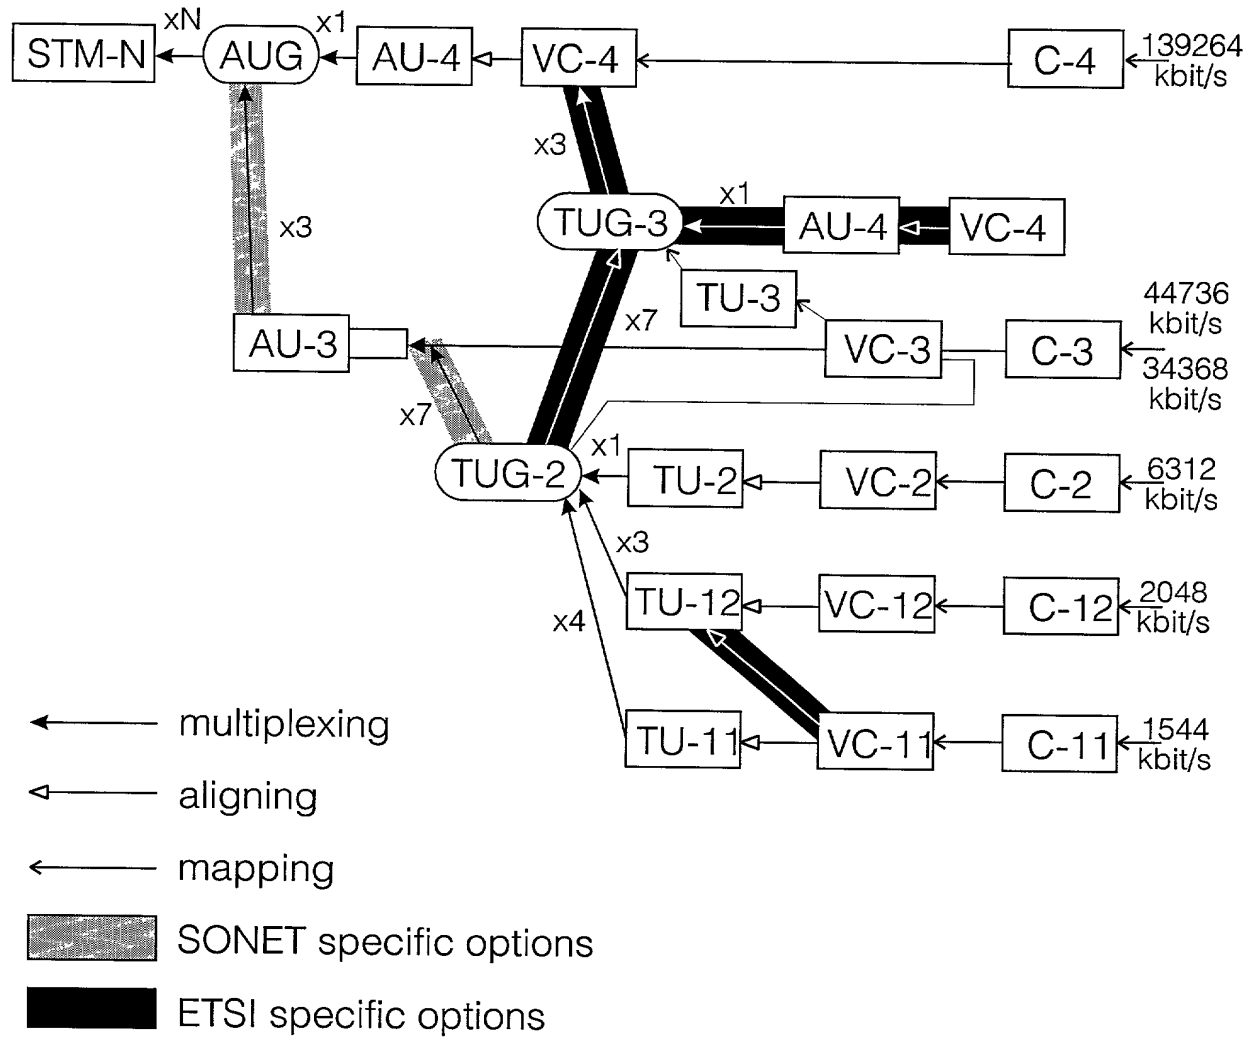


Fig. 2
(Prior Art)

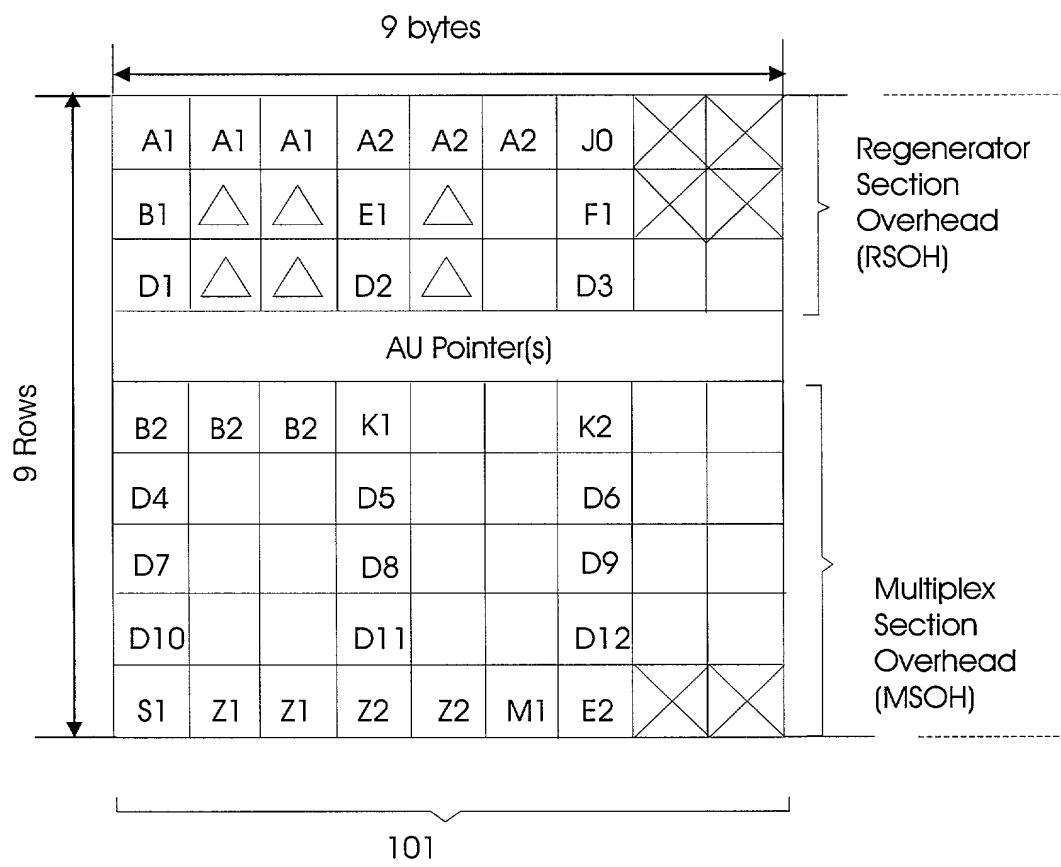


Fig. 3
(Prior Art)

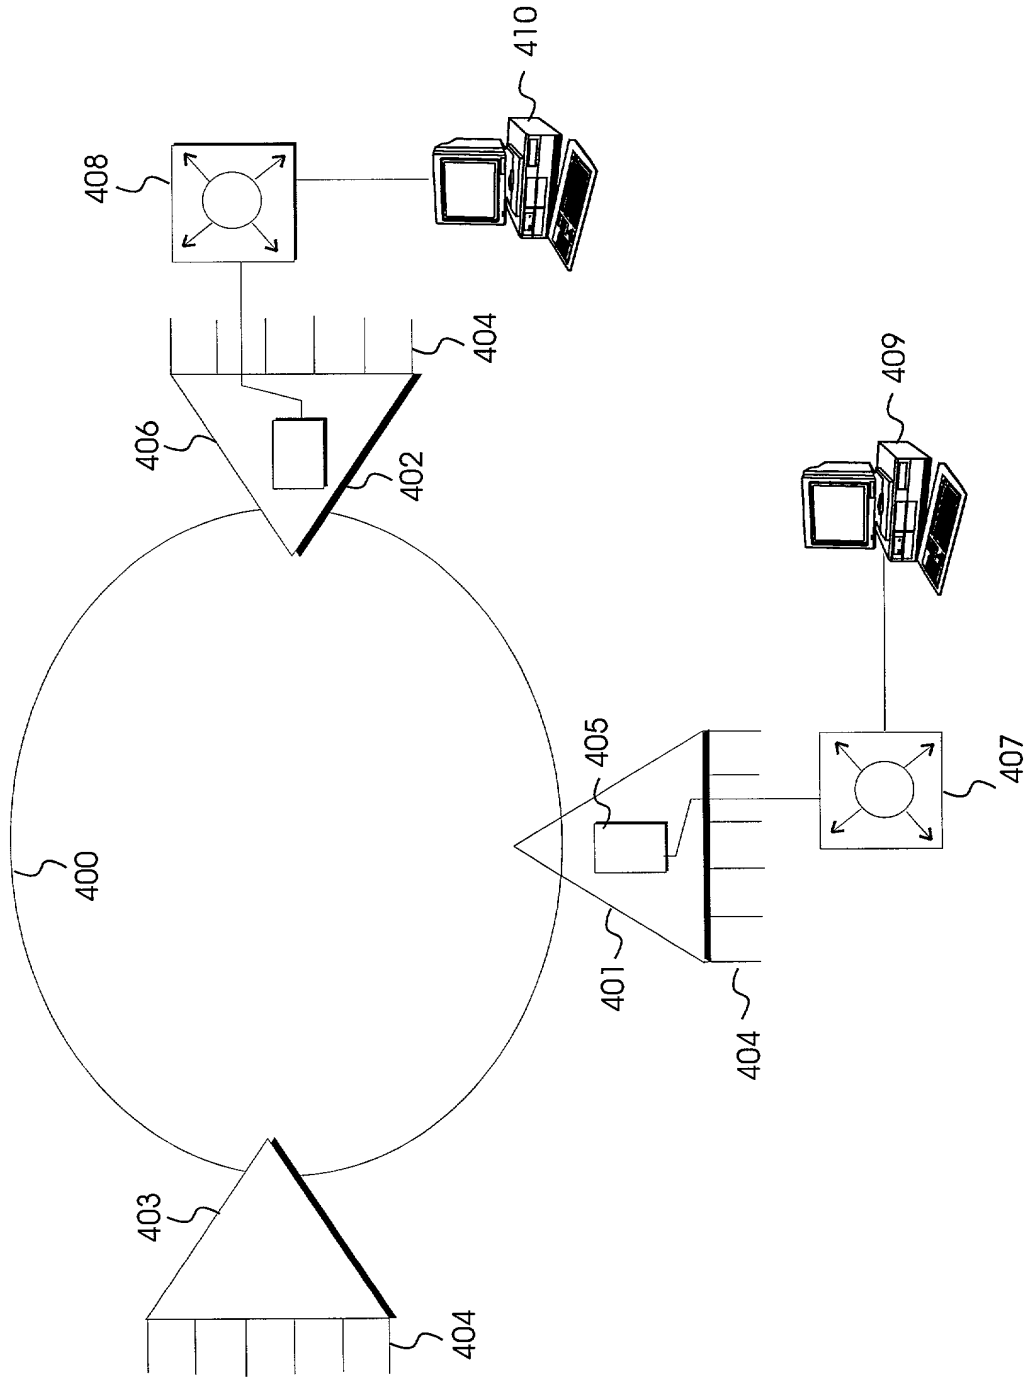


Fig. 4

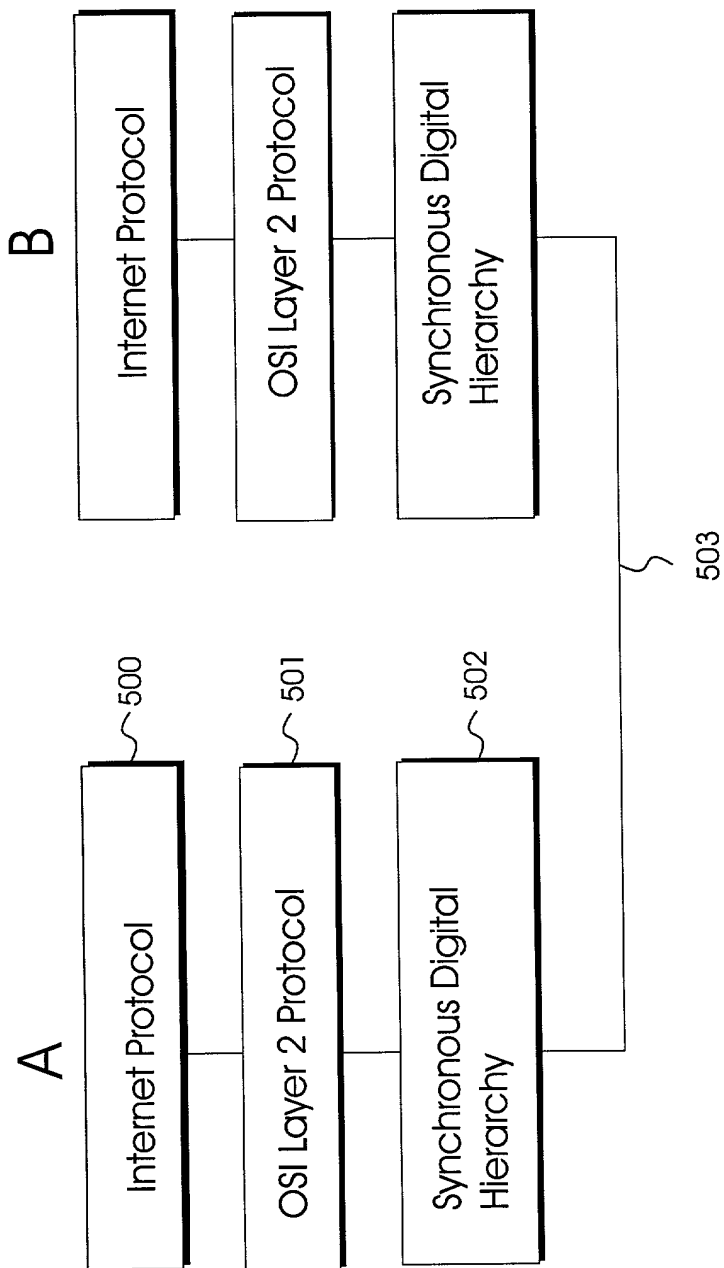


Fig.5

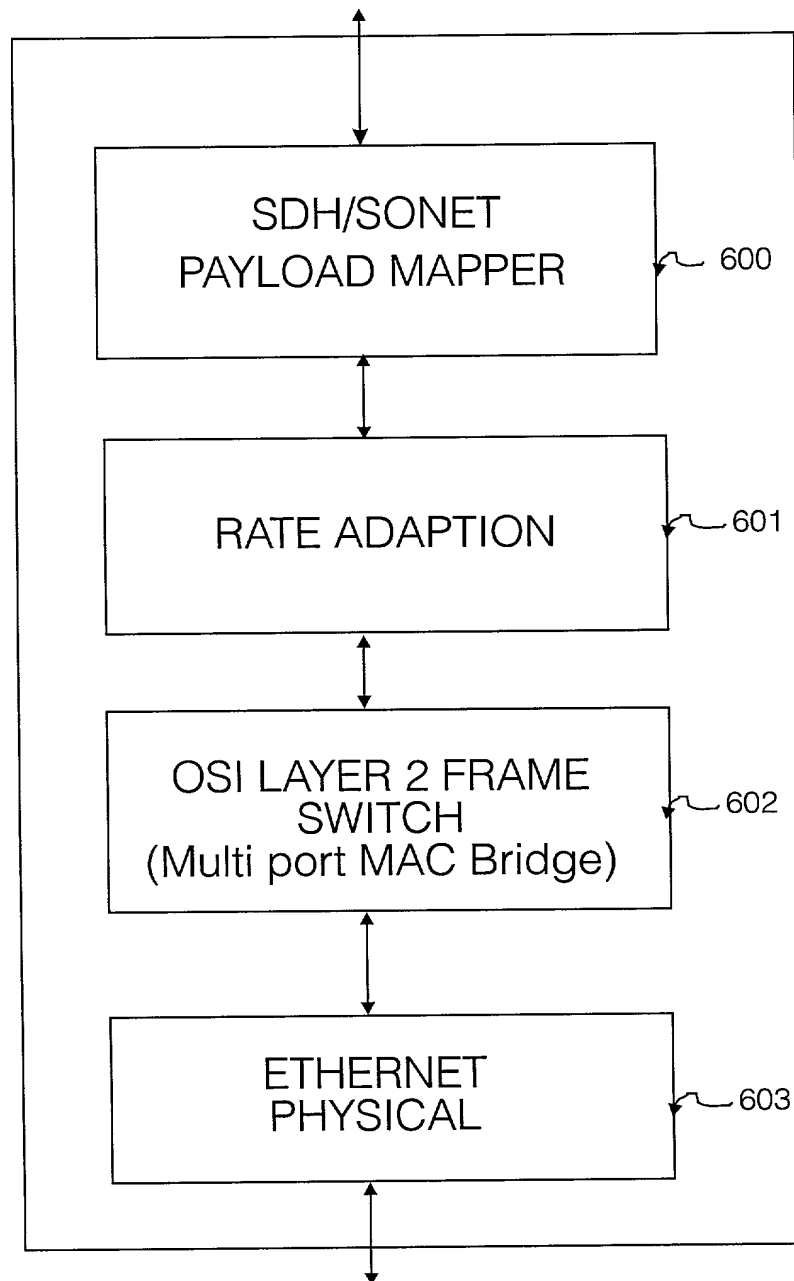


Fig. 6

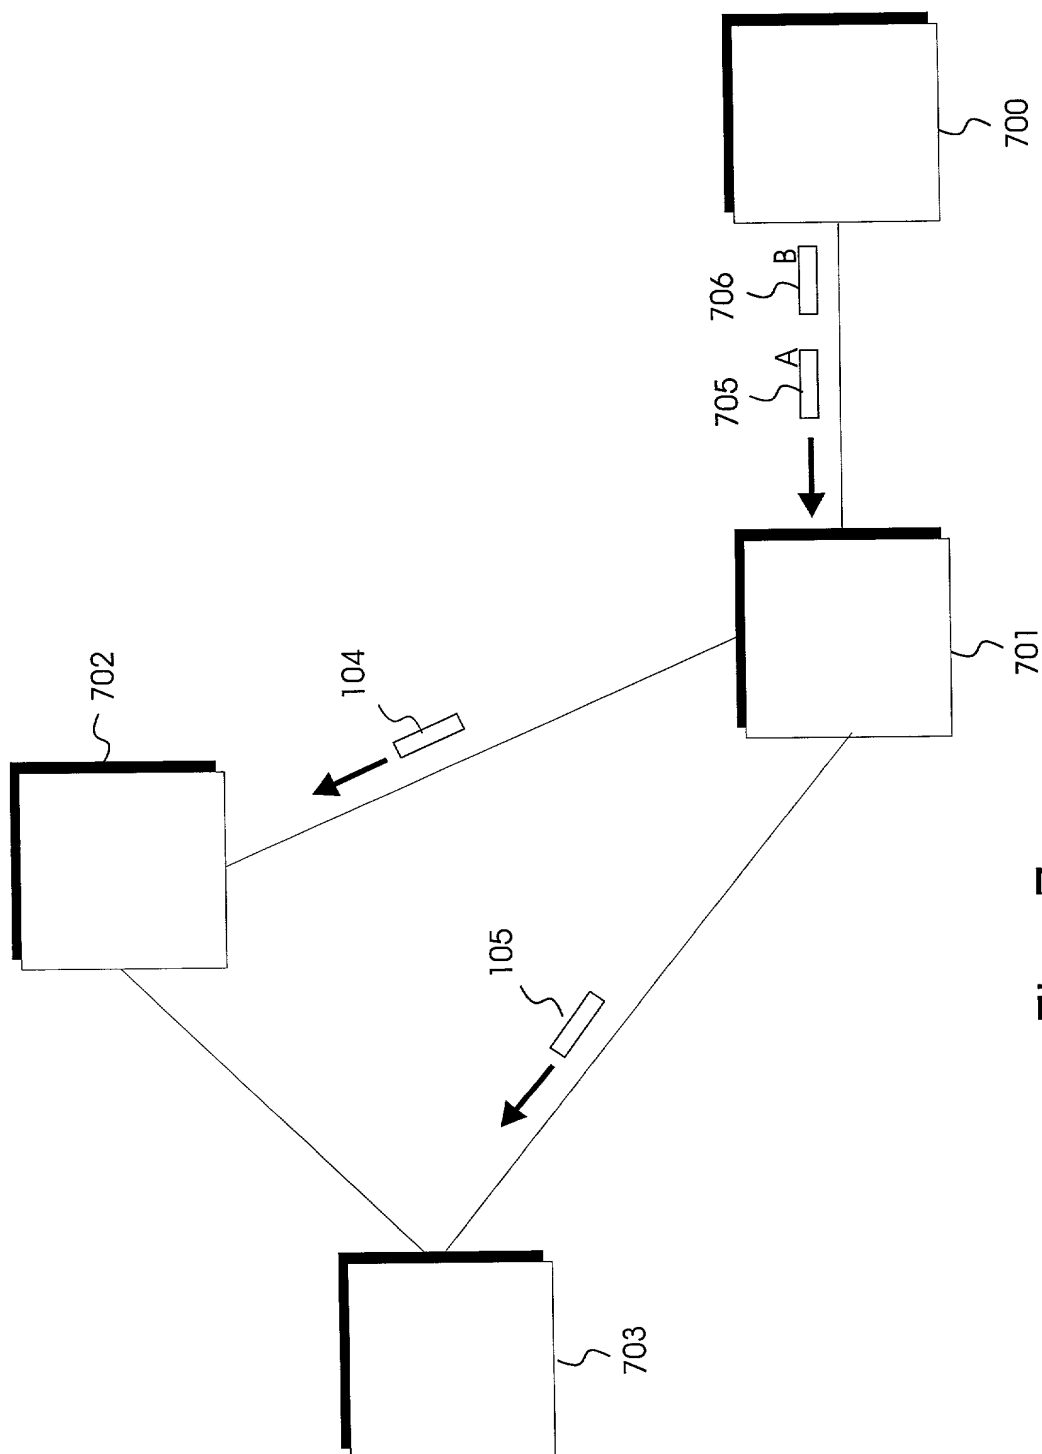


Fig. 7

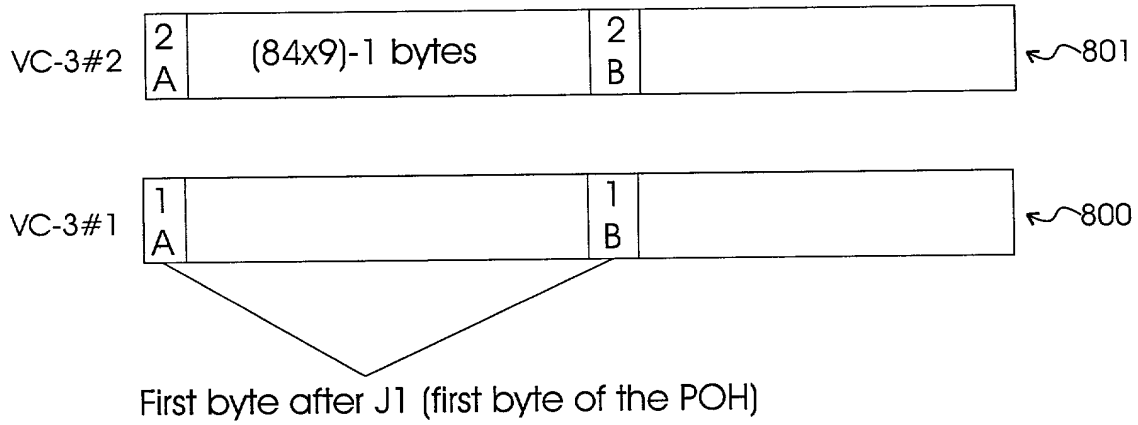


Fig. 8

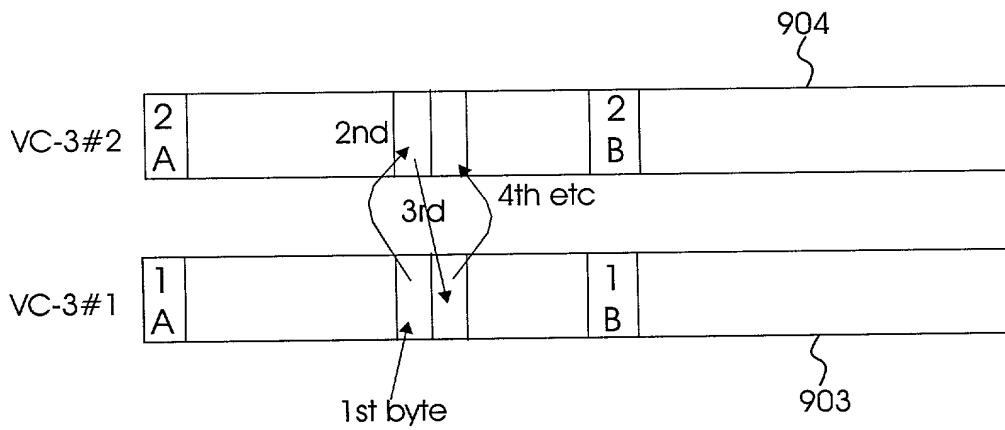


Fig. 10

9/15

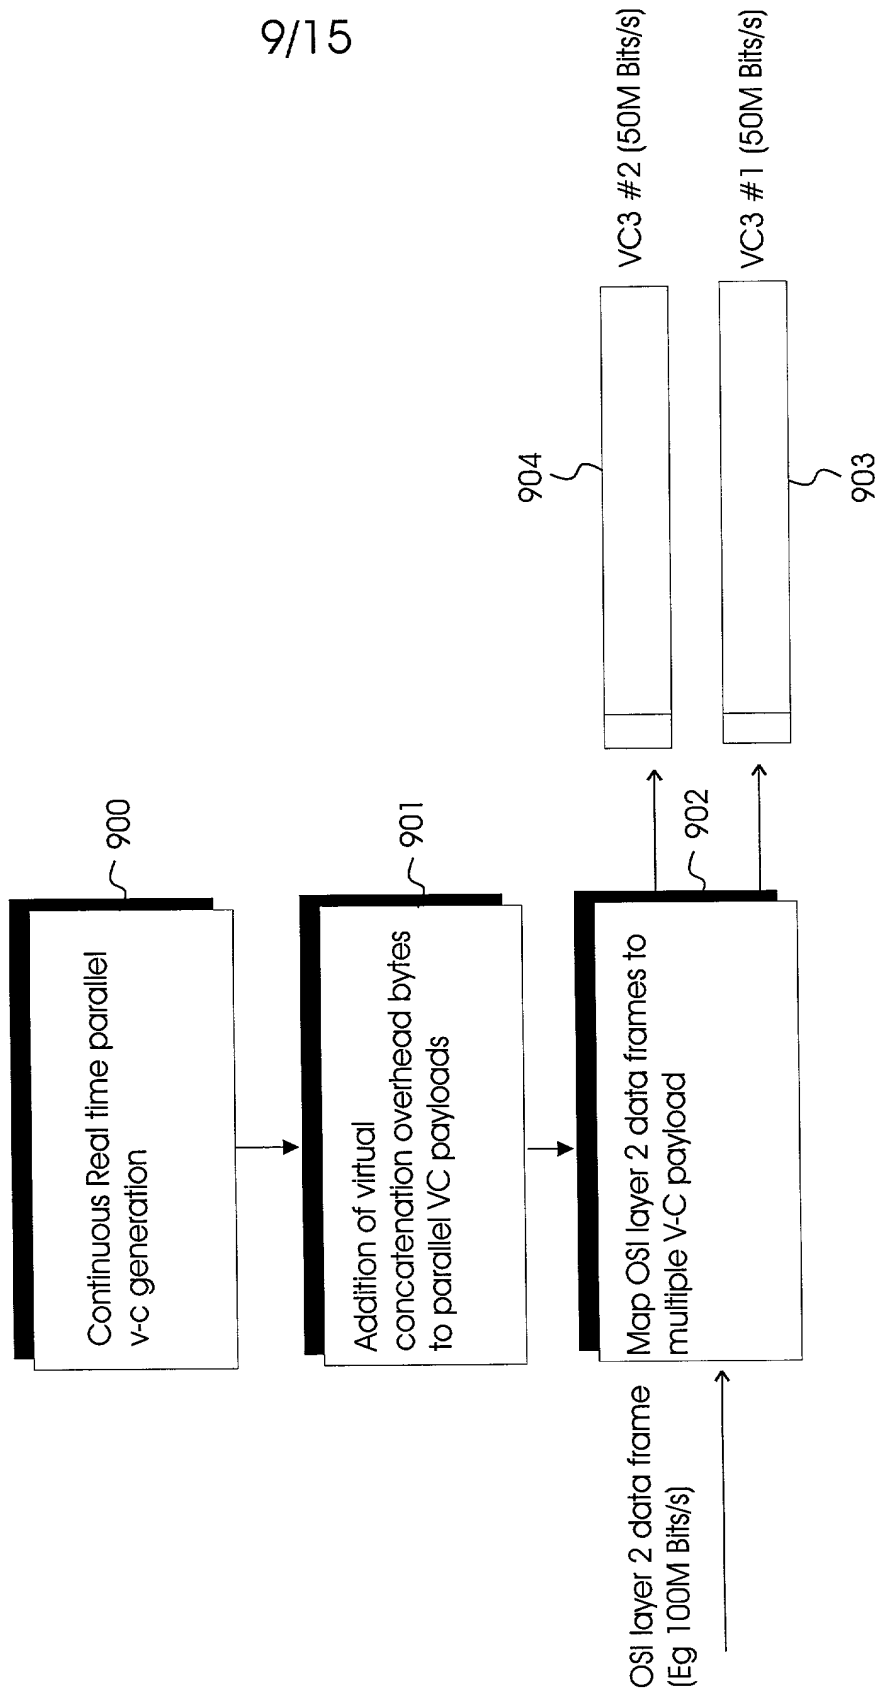


Fig. 9

10/15

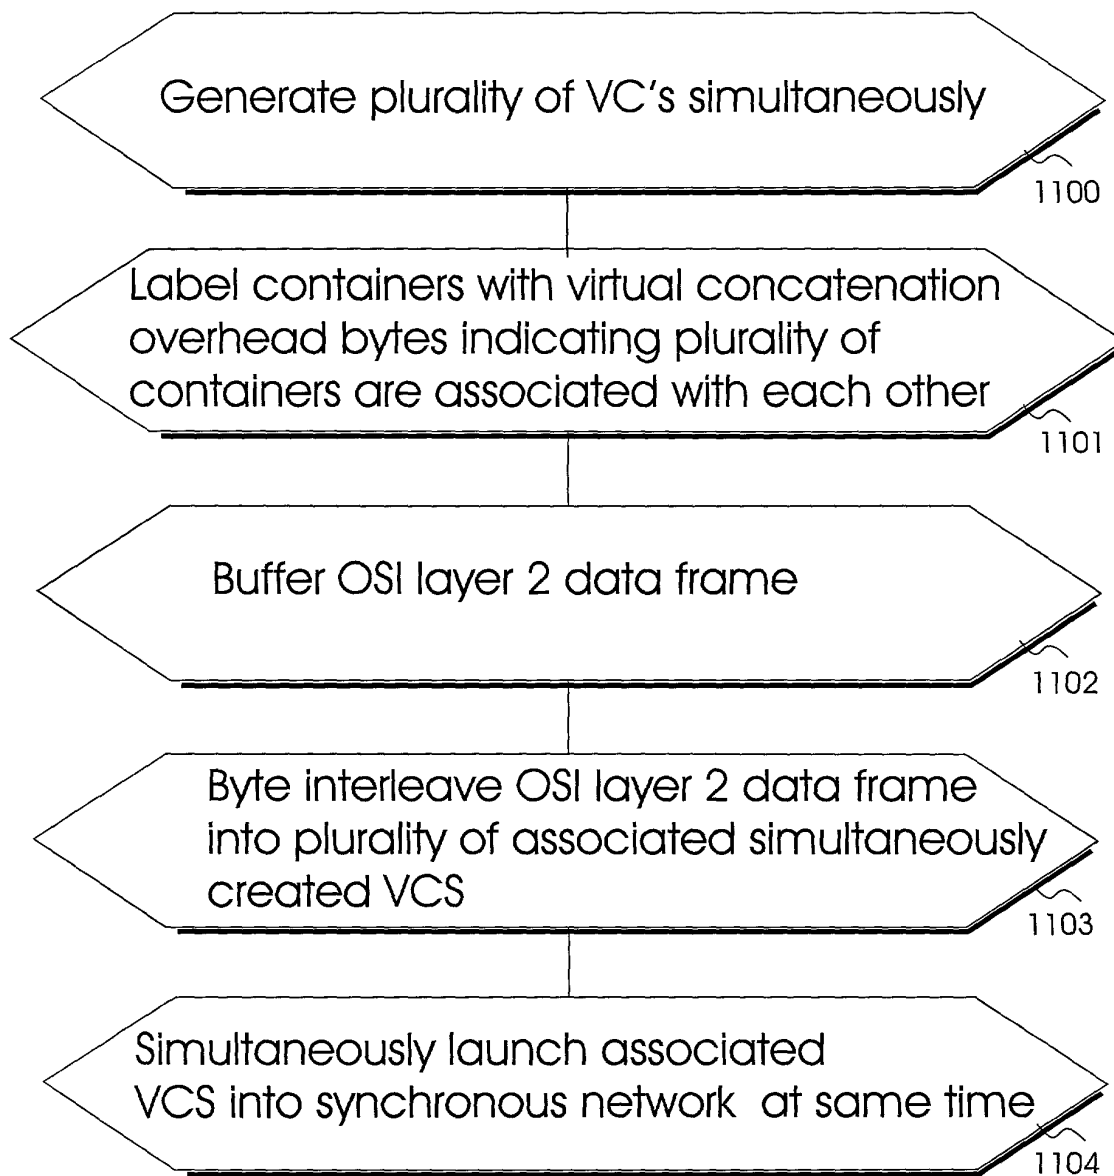


Fig. 11

11/15

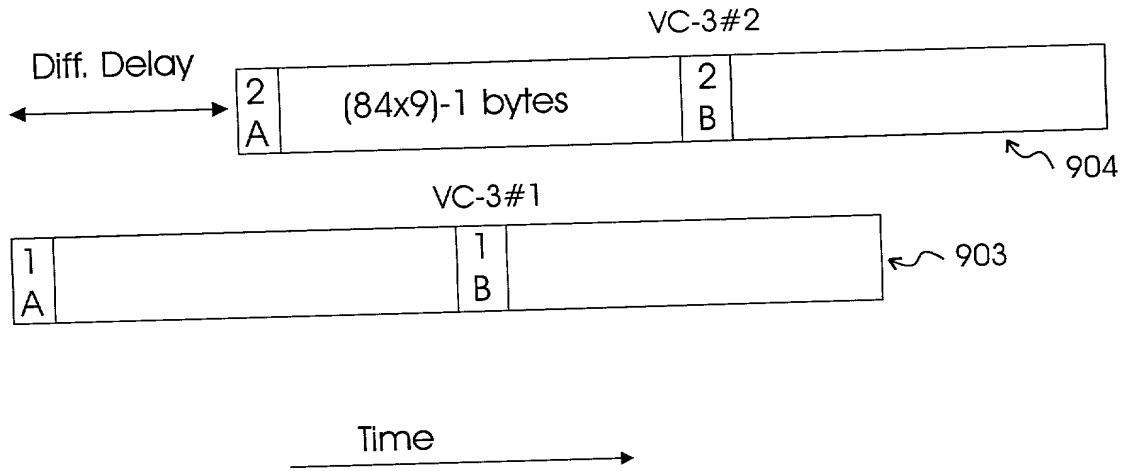


Fig. 12





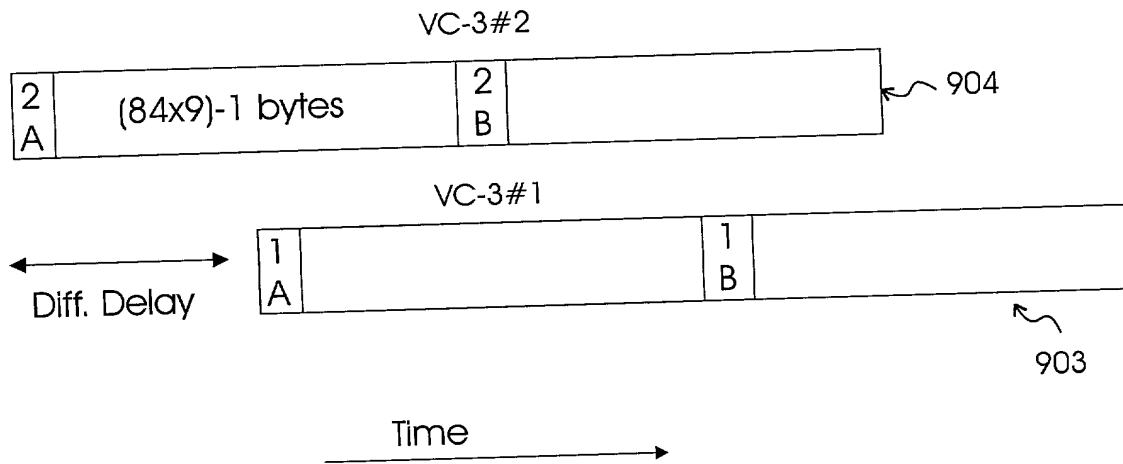


Fig. 13

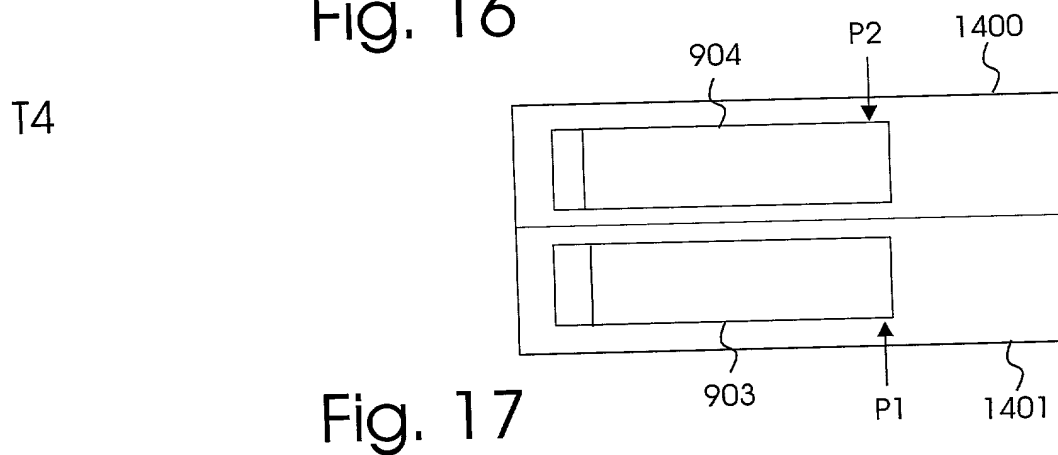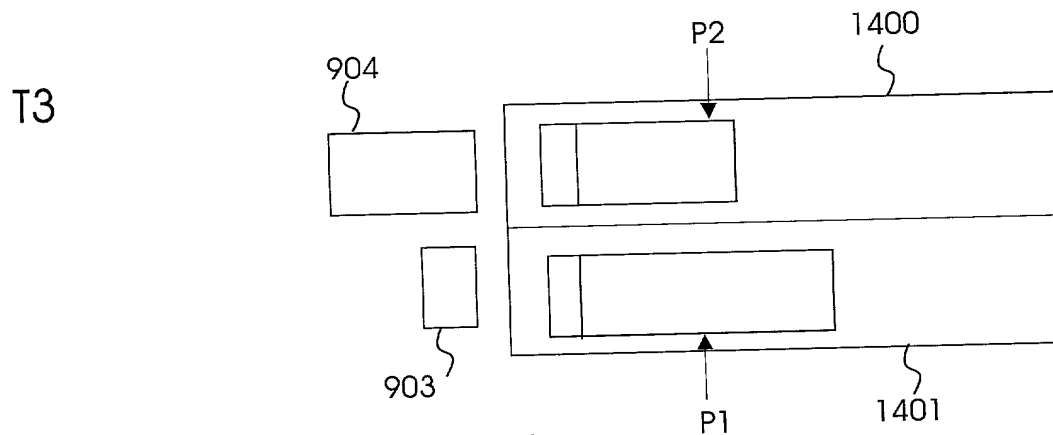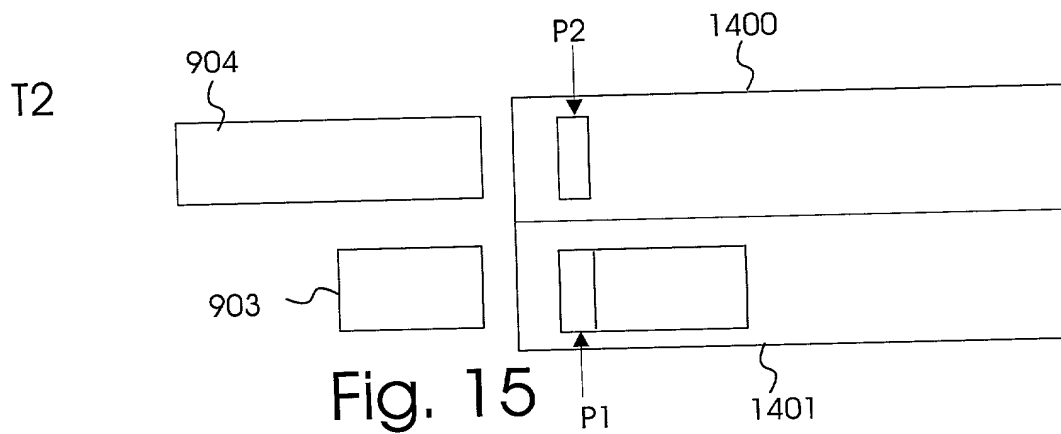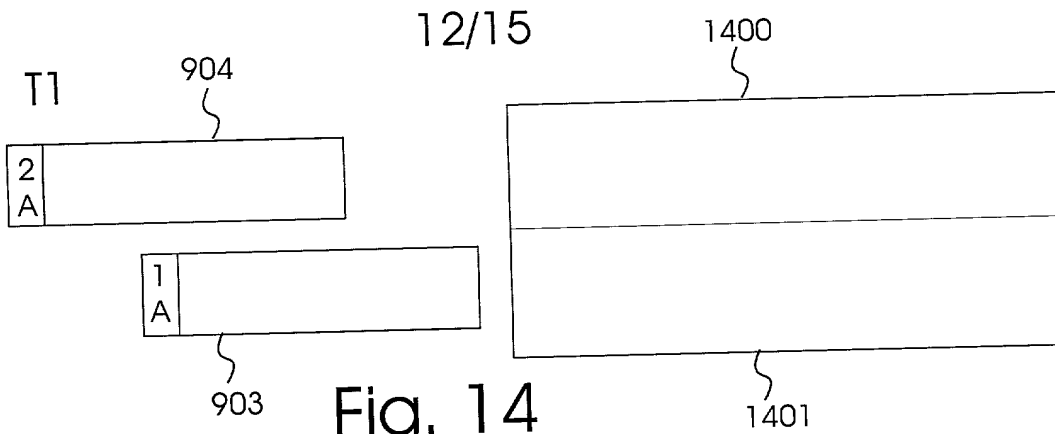

13/15

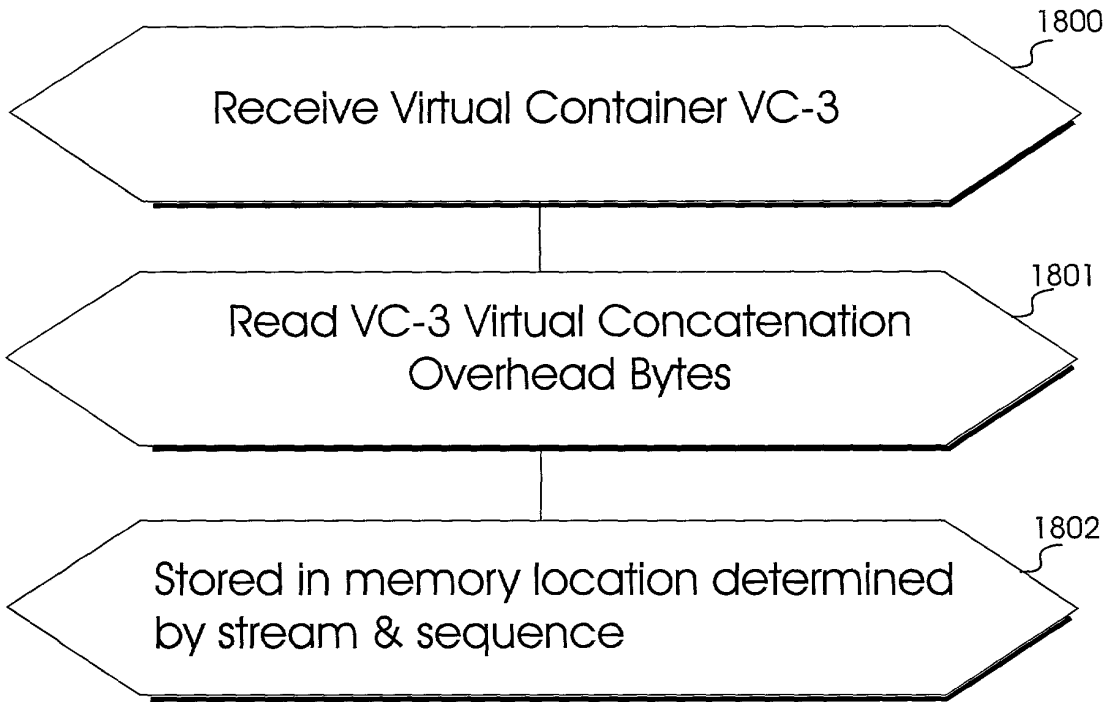


Fig. 18

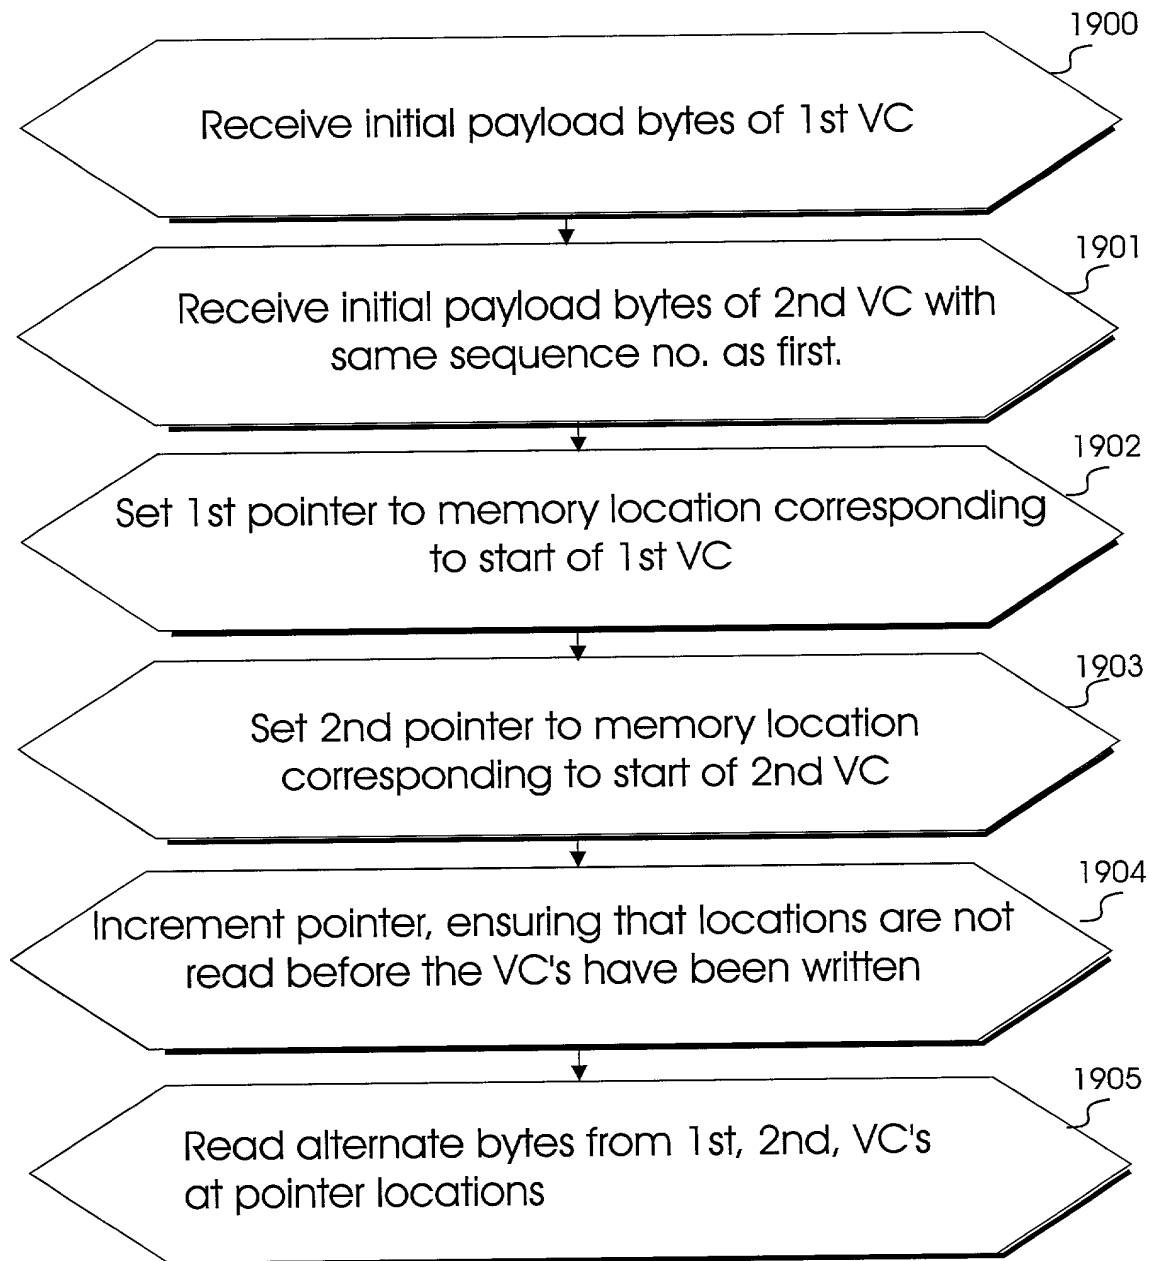


Fig. 19

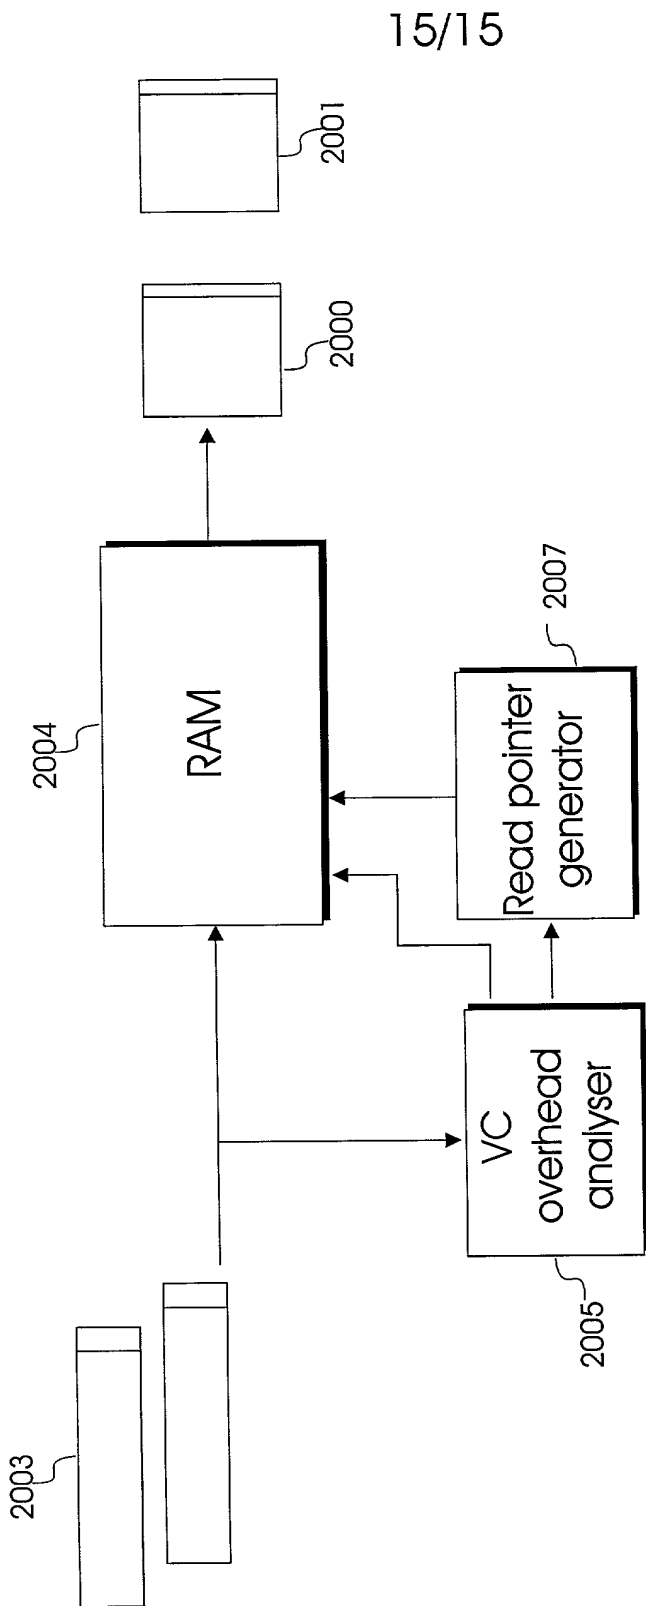


Fig. 20